SUWANNEE RIVER WATER MANAGEMENT DISTRICT

MEMORANDUM

TO: Governing Board

FROM: Robbie McKinney, Hydrologic Program Manager, Office of Water Resources

THRU: Hugh Thomas, Executive Director

DATE: July 31, 2024

RE: July 2024 Hydrologic Conditions Report

RAINFALL

- Districtwide average rainfall for the month was 7.53", which was 0.17" less than the 1932-2023 average of 7.70" (Table 1, Figure 1). The 12-month period ending July 31 reflected a Districtwide rainfall surplus of 0.13", which was an improvement to the 1.38" deficit seen at the end of June. Most District counties received anywhere between 5" and 9" of rainfall on average, with areas of Madison, Hamilton, Columbia, Baker, Union, Bradford, and Levy counties receiving more than 12" of rainfall (Figure 2).

- Overall, a 12-month rainfall surplus was present for each basin except the Santa Fe and Waccasassa Basins, which had sizable deficits at the end of July (Figure 3). Areas of twelve-month surpluses greater than 14" were represented in 3 of the basins, while portions with deficits of greater than 10" were also seen in 4 of the river basins. Each of the basins also had 3-month rainfall deficits with the Aucilla Basin transitioning from a surplus to a deficit at month's end (Figure 4). Areas of surpluses greater than 3 inches were prevalent in 4 of the basins, while portions with greater than 7" deficits were seen throughout the most river basins over the past 3 months.

SURFACE WATER

- **Rivers:** Almost all river gages in Figure 5 finished the month in either the normal (25^{th} – 75^{th} percentile) or above normal (75^{th} – 90^{th} percentile) flow range with most increasing in flow since last month. Other rivers throughout South Georgia and North Florida also finished the month in either the above normal or high (>90^{th} percentile) flow categories (Figure 6) due to higher-than-average localized rainfall patterns in July. The Santa Fe River near Ft. White gage began and ended the month in the below normal (10^{th} – 25^{th} percentile) flow range.

- **Lakes**: Water levels increased at most of the monitored lakes in the District this month (Figure 7). The median increase in stage across all measured lakes was around 0.3', with 7 of the lakes still ending the month below their respective long-term average. Snead's Smokehouse Lake and Lake Sampson both represented the largest water level rises among lakes this month with increases of around 0.74'.

- **Springs**: Flow measurements were made at 29 springs in July by the U.S. Geological Survey (USGS), District staff, and contractors. Both Fanning Springs (Figure 8) and Manatee Springs (Figure 9) had flows in the normal range throughout the entire month. Manatee Springs came close to below normal flows in the middle of the month but saw a flow increase toward the end of July.

GROUNDWATER

Upper Floridan Aquifer (UFA) levels across the District reflected conditions ranging from extremely high (>90th percentile) in the north to a spot in Dixie county with extremely low (<10th percentile) aquifer levels (Figure 10). Overall, groundwater levels decreased by a median of 0.5' since the end of July and ended June with a Districtwide average around the 57th percentile.

Many index wells remained higher than their respective historical monthly average level at the end of the month (Figure 11). Long-term District UFA well levels ended the month in the high, normal, or low categories (Figure 12a). Long-term wells with records that extend back to at least 1964 showed mostly decreasing water levels this month relative to last month (Figure 12b).

CLIMATE AND DROUGHT OUTLOOK

ENSO-neutral conditions are expected to continue with a 70% chance of La Niña emergence from August to October and continuing into winter 2024-25 (79% chance from November to January).

The NOAA three-month seasonal outlook suggests above normal temperatures along with above normal precipitation throughout the District from August through October 2024.

The U.S. Drought Monitor report released on Thursday, August 8th, shows no drought characteristics in any of the District counties.

CONSERVATION

Water conservation continues to be necessary to sustain healthy groundwater levels and flows in District springs and rivers. All users are urged to eliminate unnecessary uses. Landscape irrigation during Daylight Saving Time (March 10, 2024, to November 3, 2024) is limited to twice per week based on a District water conservation rule that applies to residential landscaping, public or commercial recreation areas, and businesses that are not regulated by a District-issued water use permit. Information about SRWMD's year-round conservation measures is available at http://www.srwmd.org/index.aspx?NID=337.

ACKNOWLEDGMENTS

The Hydrologic Conditions Report is a monthly combined effort between the Offices of Water Resources and Hydrologic Data Services data collection and review programs. Acknowledgment is made to the following staff for their contributions to the timely production of this report:

- Data Collection: Jamie Gaylord, Matthew Jordan, Dylan Mock, Gene Page, Kevin Posada, and Vince Robinson
- QA/QC and Reporting: Stephanie Armstrong, Susie Hetrick, Robbie McKinney, and Brandi Sistrunk
- Administrative Support/Document Preparation/IT: Paul Buchanan, Bo Cameron, Tyler Jordan, Andrew Neel, and April Olive

This report is compiled in compliance with Chapter 40B-21.211, Florida Administrative Code, using rainfall (gage-adjusted radar-derived estimates), groundwater (121 wells), surface water (35 stations), and general information such as drought indices and forecasts. Data are provisional and updated as revised data become available. Data are available at http://www.mysuwanneeriver.com/507/Water-Data-Portal or upon request.

Table 1: Nexrad Monthly Rainfall Totals by County (inches)

County	July 2024	July Average*	Month % of Normal	Total Last 12 Months	Annual % of Normal*
Alachua	7.18	7.38	97%	45.39	86%
Baker	8.98	7.26	124%	53.65	102%
Bradford	9.48	7.42	128%	52.10	100%
Columbia	8.17	7.21	113%	53.02	100%
Dixie	7.20	9.23	78%	49.89	86%
Gilchrist	7.82	8.00	98%	45.52	83%
Hamilton	7.94	6.60	120%	61.35	118%
Jefferson	5.53	7.20	77%	61.18	109%
Lafayette	7.39	8.15	91%	55.03	100%
Levy	7.99	8.54	94%	47.09	84%
Madison	7.18	6.86	105%	65.66	123%
Suwannee	7.88	7.24	109%	57.21	108%
Taylor	6.12	8.31	74%	58.86	104%
Union	8.97	7.39	121%	51.26	97%

*Based on PRISM LT81 monthly rainfall averages by county (1927-2022)

July 2024 District Average	7.53
July Long-Term Average (1932-2023)	7.70
Historical 12-month Average (1932-2023)	54.71
Past 12-Month Total	54.84
12-Month Rainfall **Surplus**/Deficit	**0.13**

Figure 1: Comparison of District-wide Monthly Rainfall

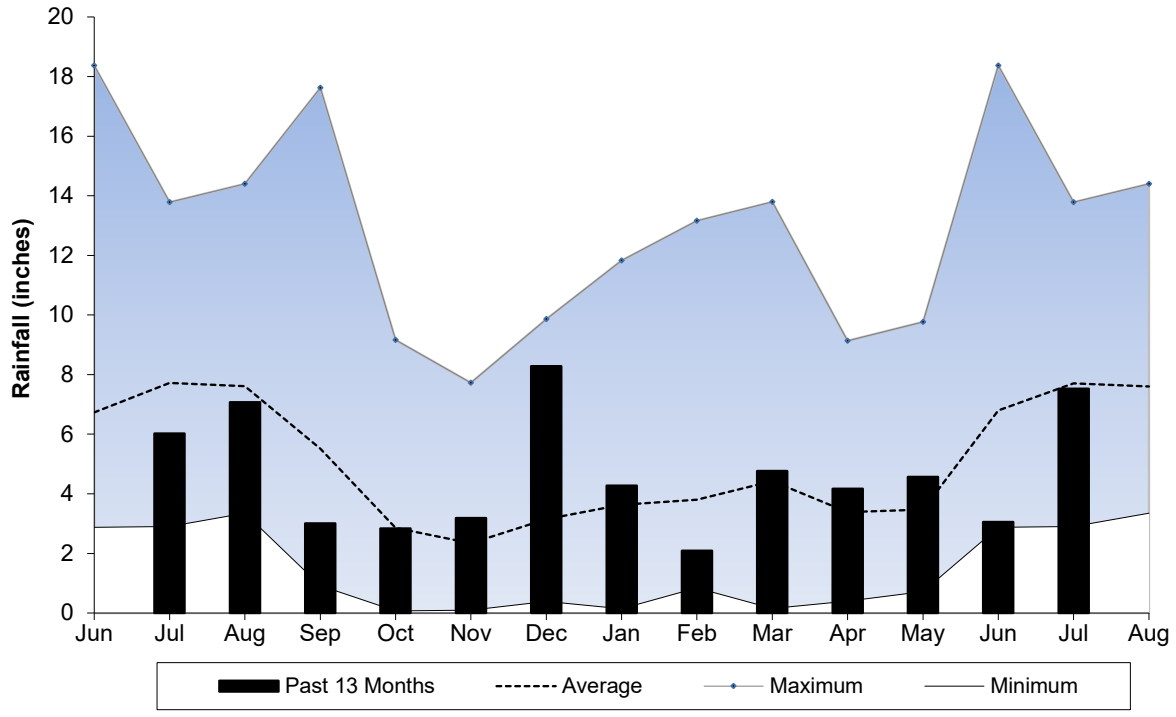

Figure 2: July 2024 SRWMD Gage-adjusted Radar Rainfall

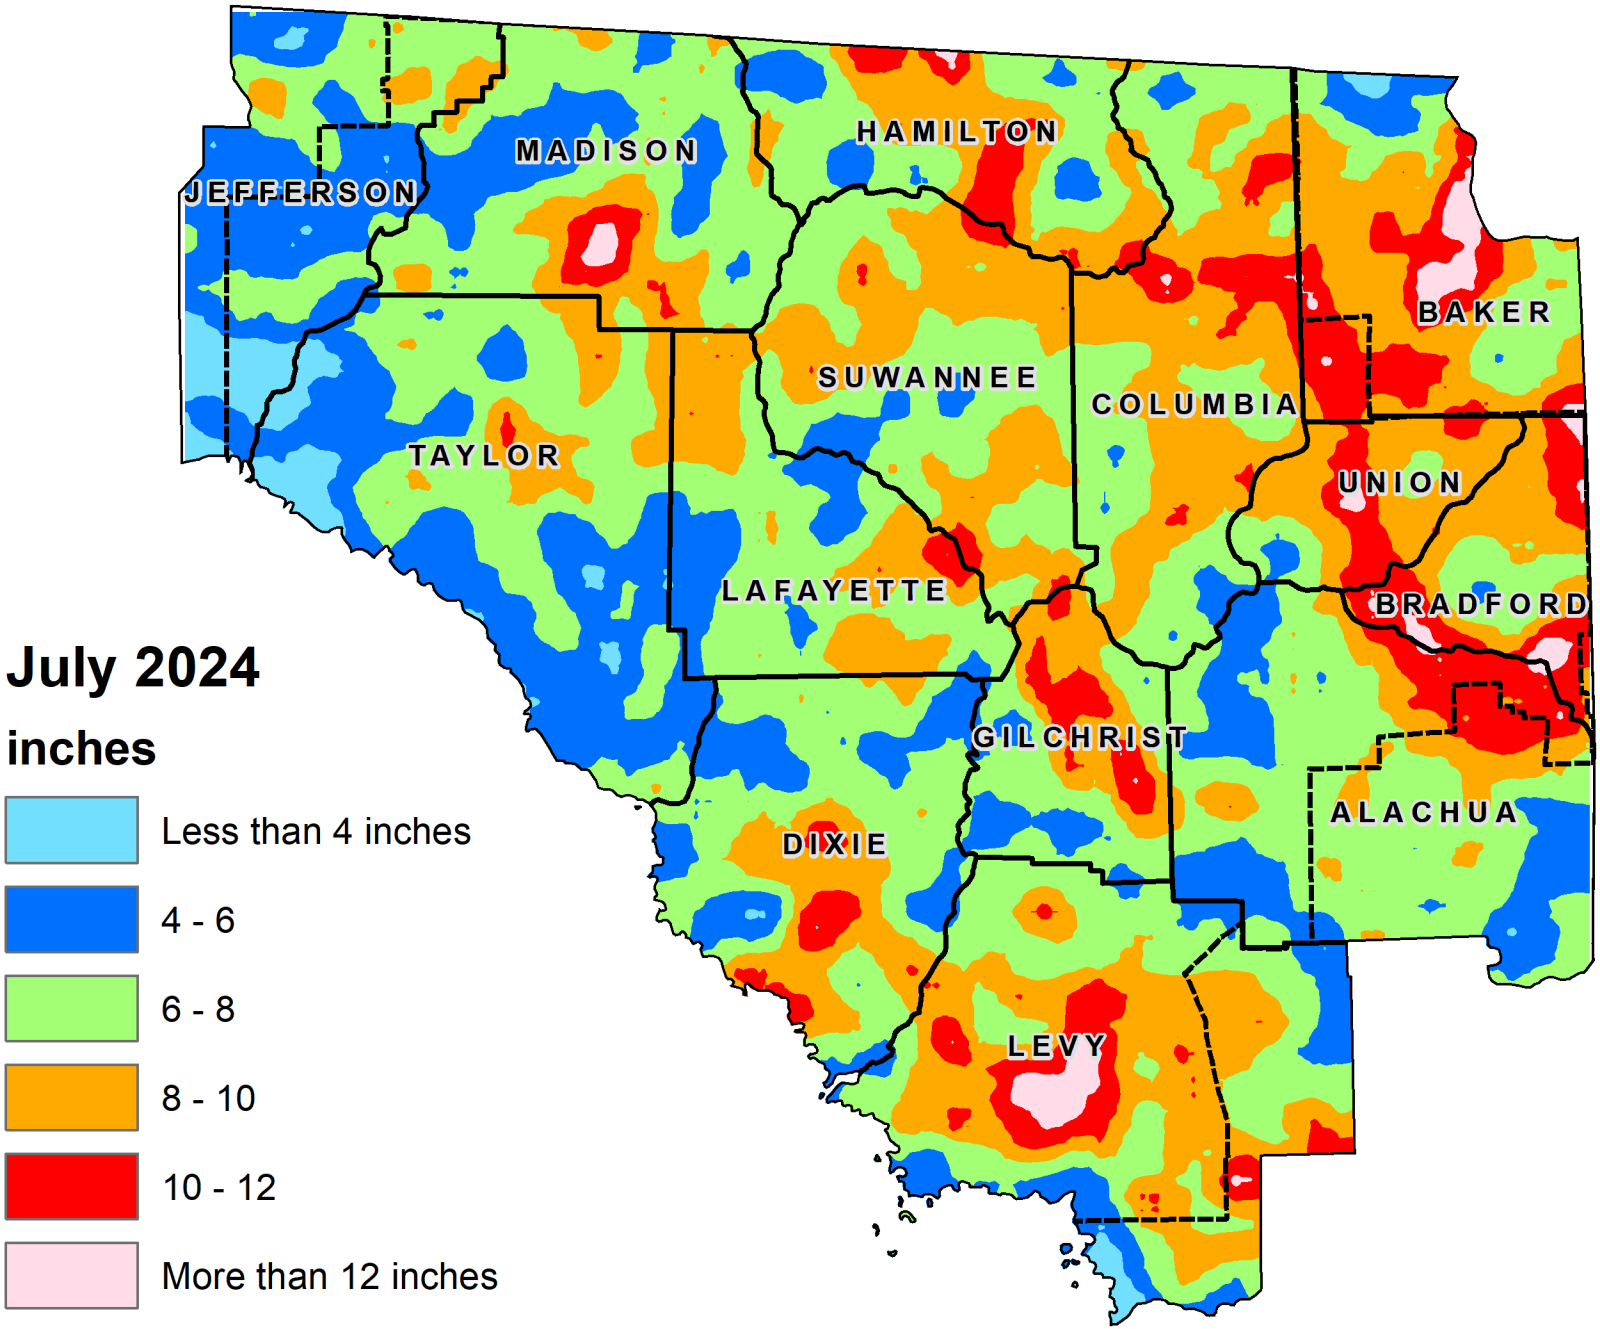

Figure 3: 12 - Month Rainfall Surplus/Deficit by River Basin through July 31, 2024

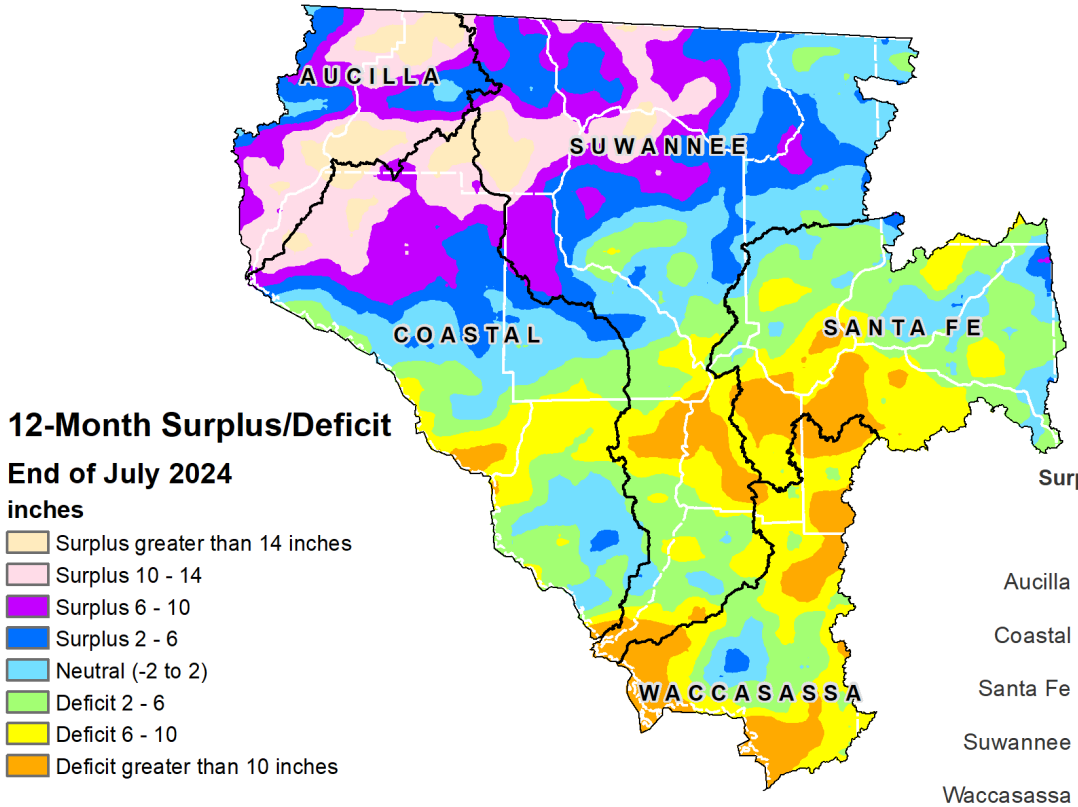

12-Month Surplus (+) or Deficit (-) By Basin

	Jul 2024	Jun 2024
Aucilla	**+10.2**	+ 8.4
Coastal	**+ 1.4**	+ 0.6
Santa Fe	**- 5.3**	- 7.5
Suwannee	**+ 1.6**	+ 0.1
Waccasassa	**- 7.6**	- 9.1

Figure 4: 3 - Month Rainfall Surplus/Deficit by River Basin through July 31, 2024

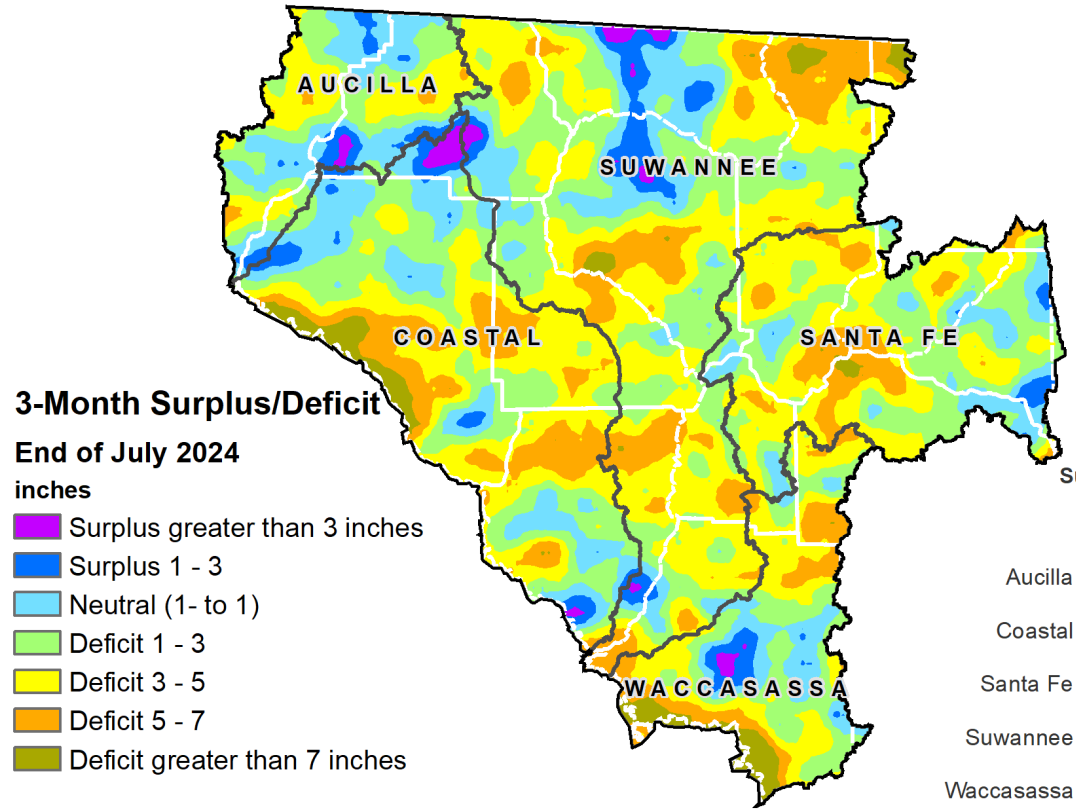

3-Month Surplus (+) or Deficit (-) By Basin

	Jul 2024	Jun 2024
Aucilla	- 1.7	+ 3.5
Coastal	- 2.9	- 1.3
Santa Fe	- 3.0	- 4.3
Suwannee	- 2.9	- 1.6
Waccasassa	- 2.8	- 4.5

Figure 5: Daily River Flow Statistics

August 1, 2023 through July 31, 2024

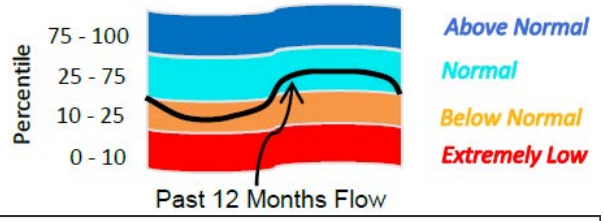

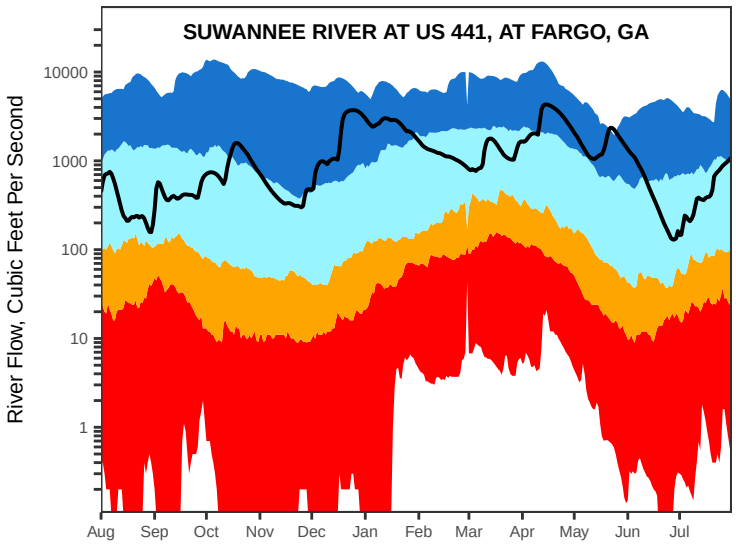

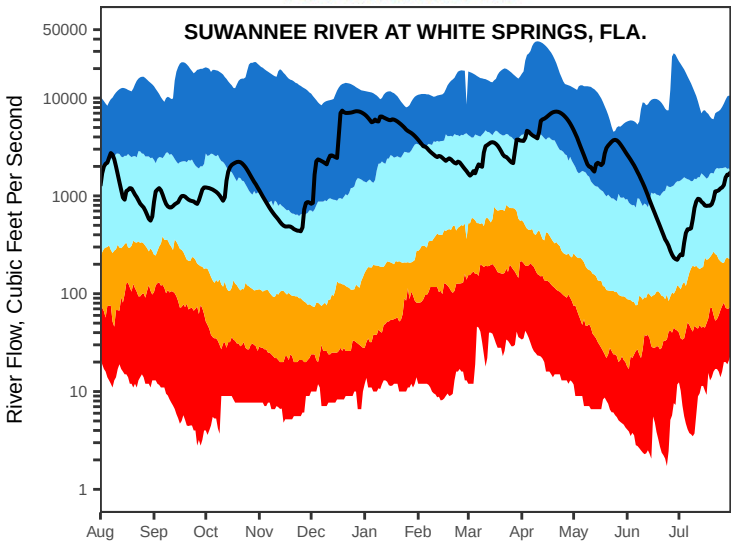

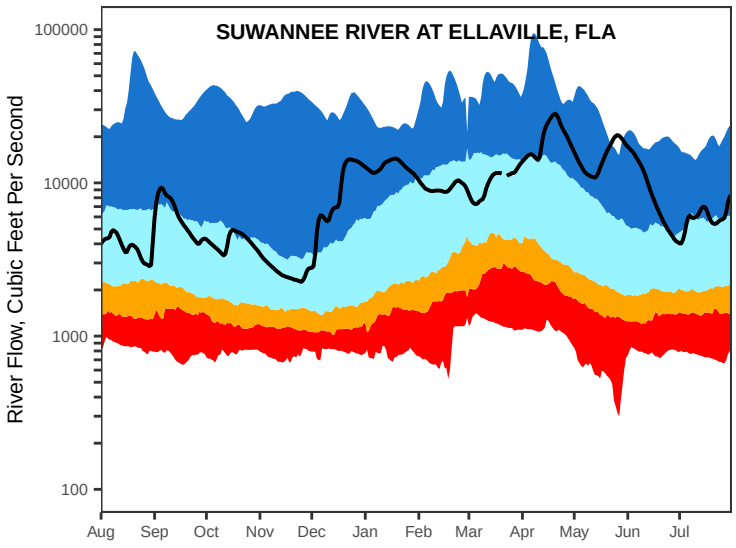

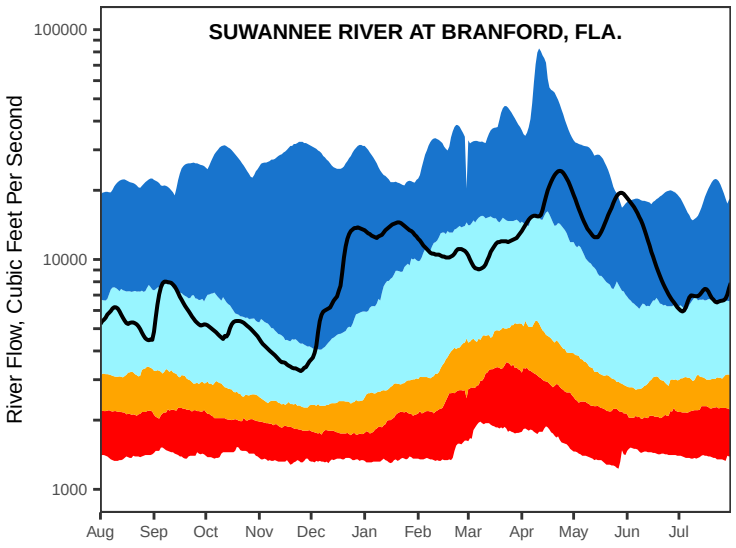

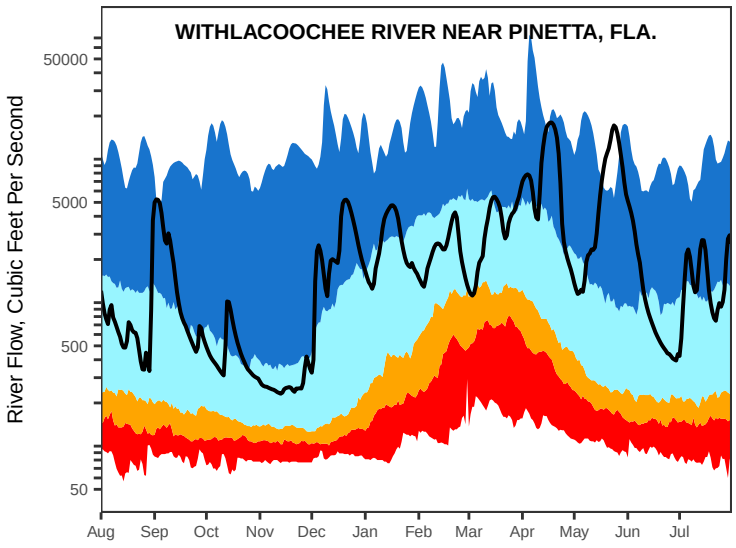

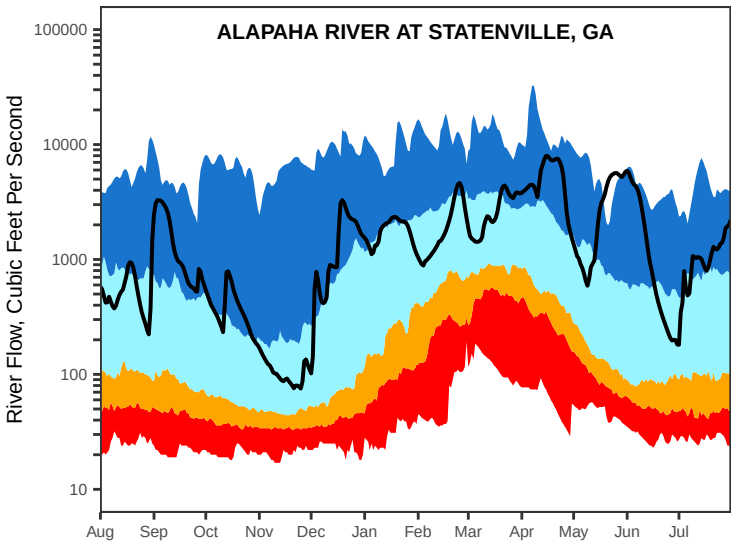

Figure 5, cont.: Daily River Flow Statistics

August 1, 2023 through July 31, 2024

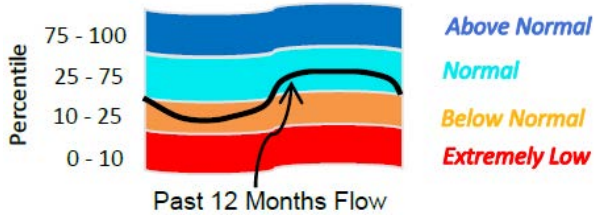

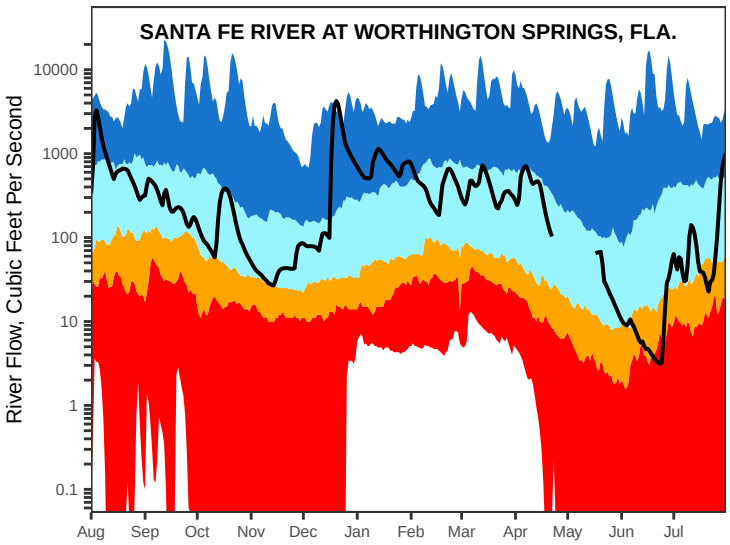

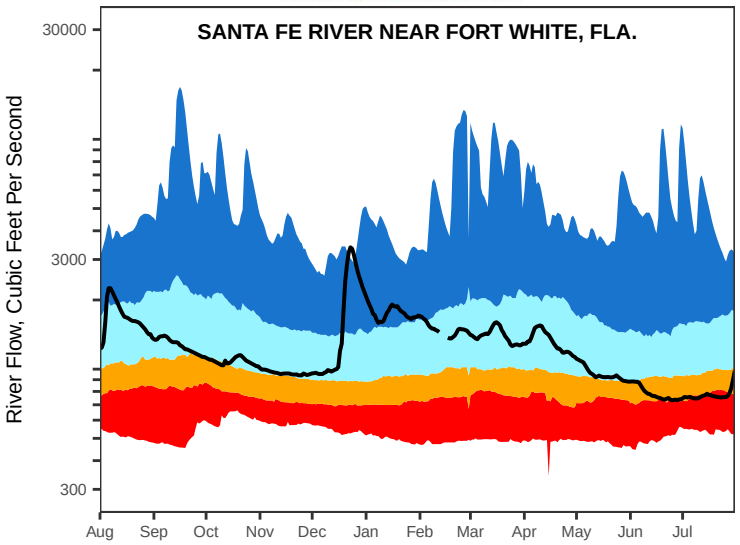

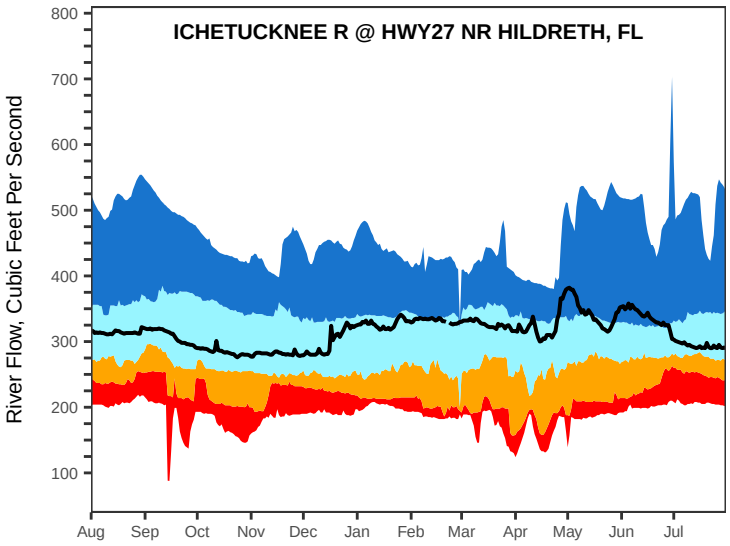

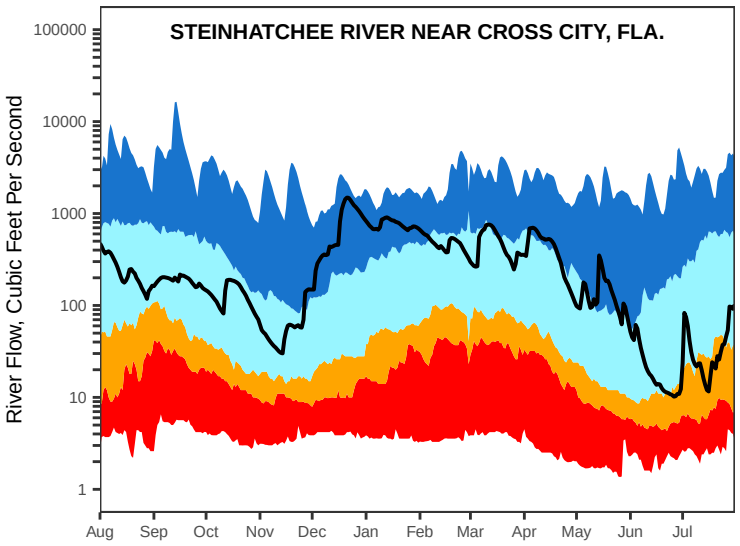

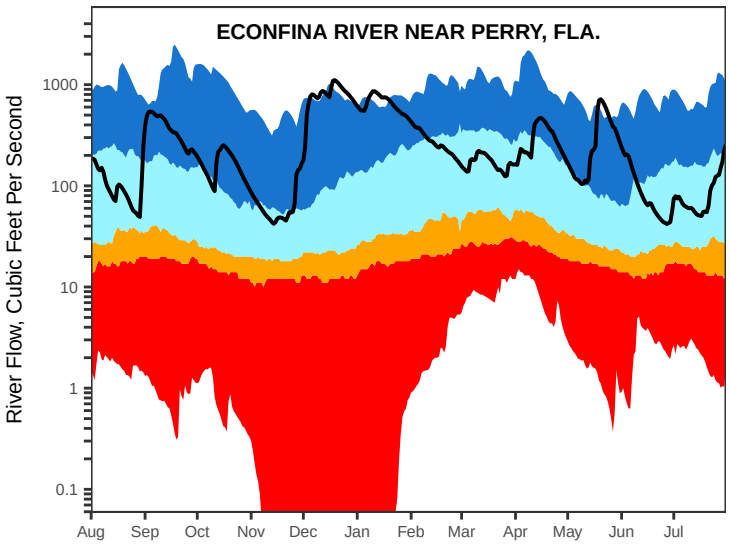

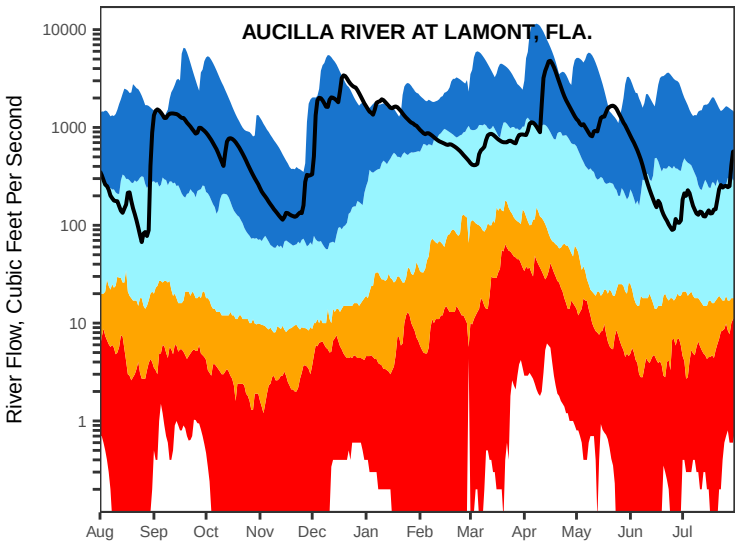

Figure 6:
Streamflow Conditions
July 2024

The Cody Scarp (or Escarpment) is an area of relatively steep topographical change that runs across north Florida. The geology above the Scarp consists of sandy soils over thick layers of mostly impermeable sediments such as clay. Streams are well-developed with dendritic (tree-like) drainage patterns. Because of the impermeable sediments, rainfall is collected in ever-growing surface streams as the land elevation falls. Below the Scarp, sandy soils overlay porous limestone. These areas are internally drained, meaning rainfall runs directly into the ground or into sinkholes instead of forming streams. In these areas, rainfall directly recharges the aquifer, which in turn discharges into rivers via springs and river bed seepage. The Scarp is important to the area's hydrology because it demarcates areas where streamflow is dependent almost entirely on recent rainfall and areas where streamflow is heavily influenced by groundwater.

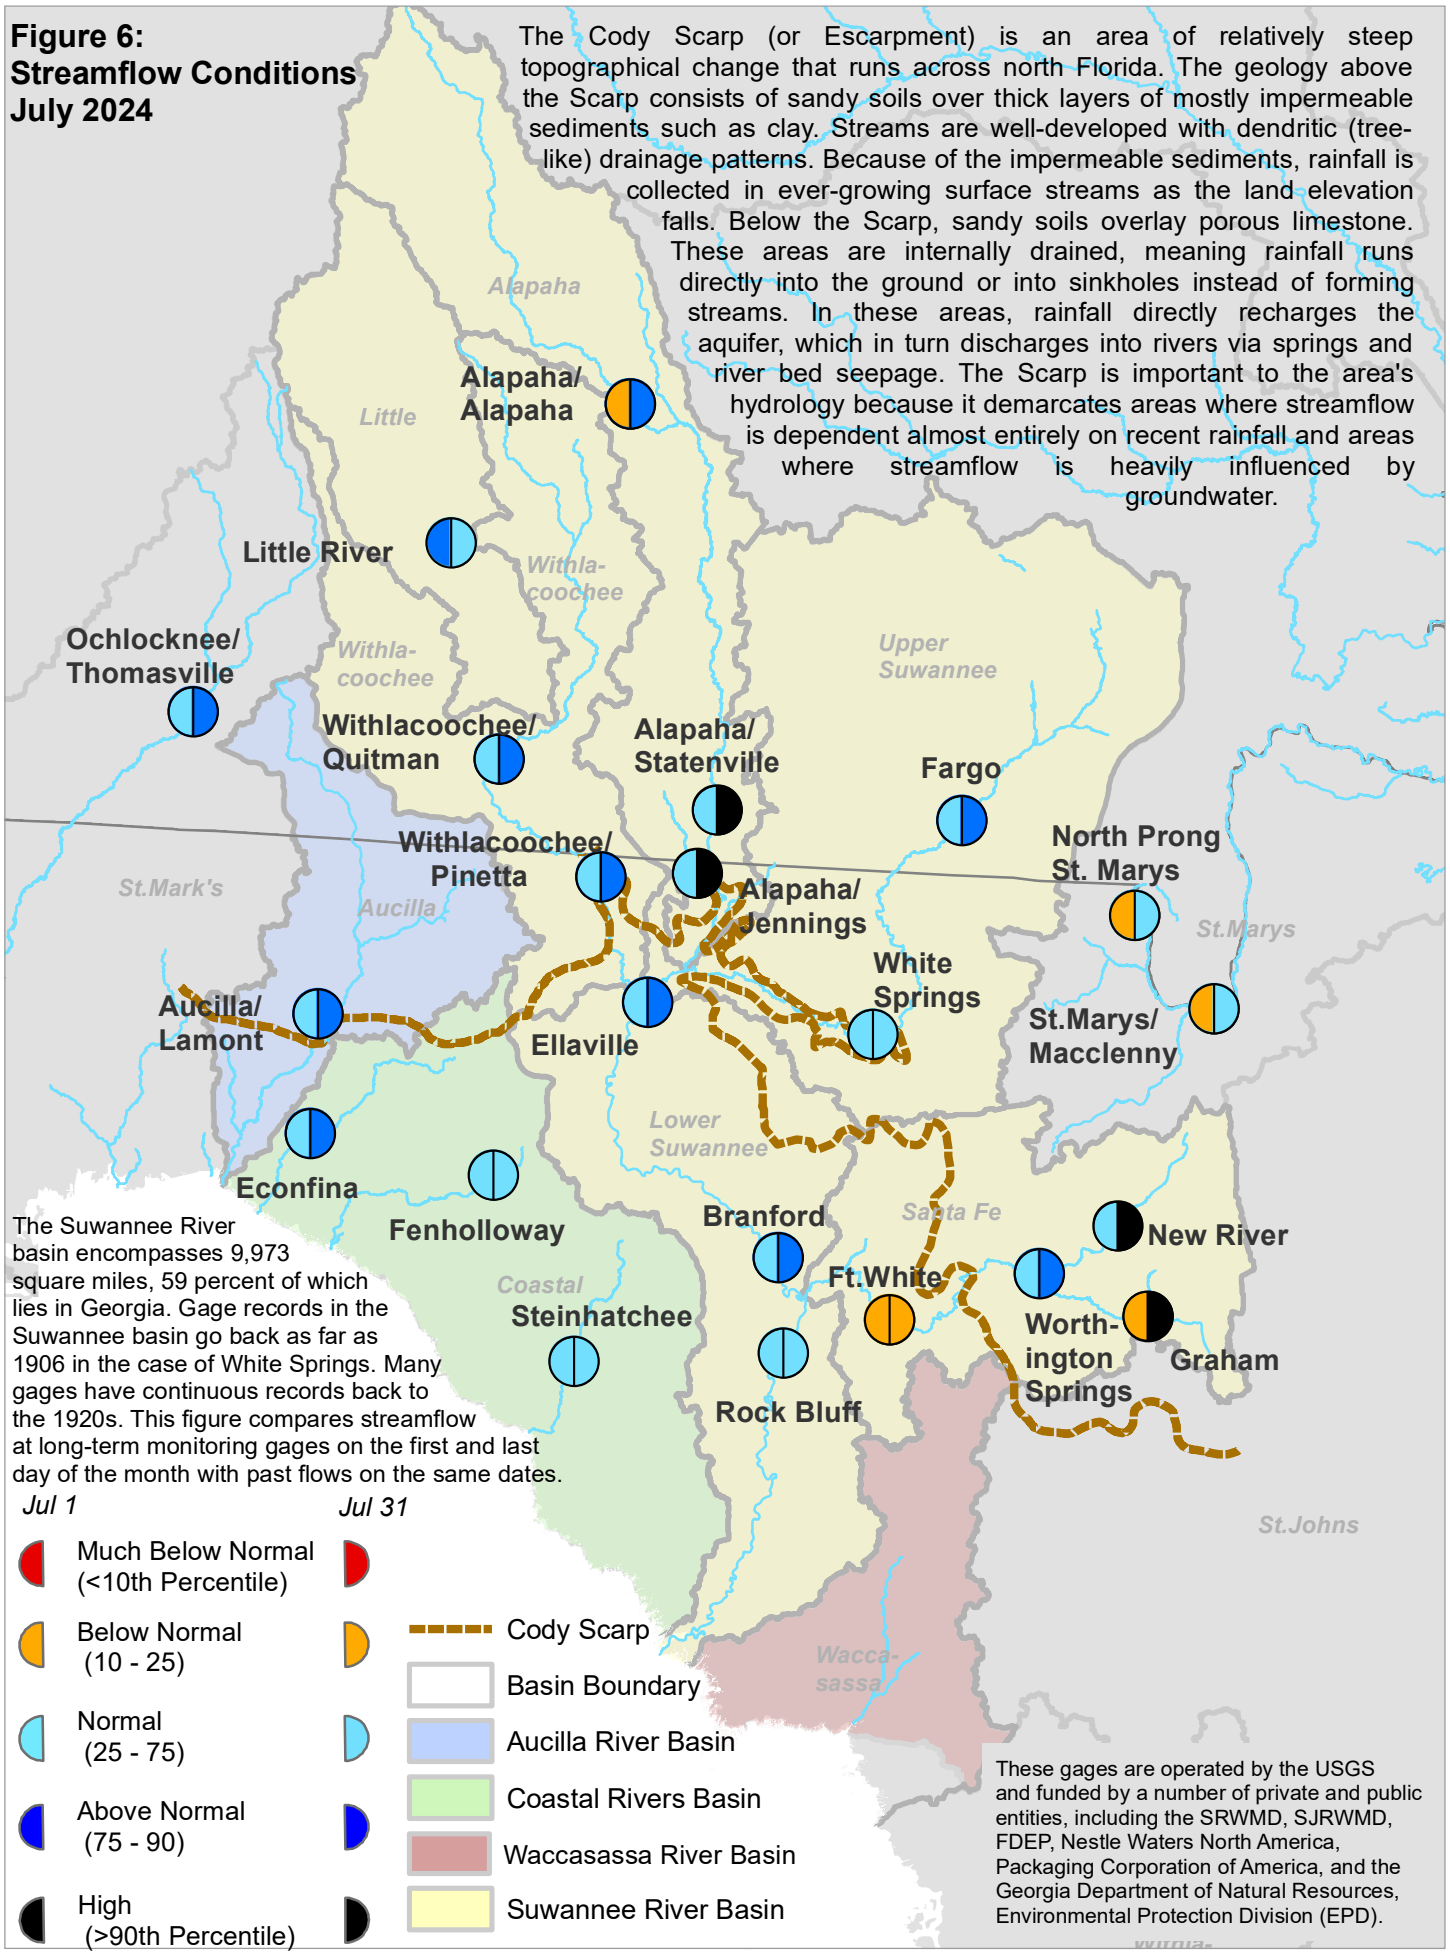

The Suwannee River basin encompasses 9,973 square miles, 59 percent of which lies in Georgia. Gage records in the Suwannee basin go back as far as 1906 in the case of White Springs. Many gages have continuous records back to the 1920s. This figure compares streamflow at long-term monitoring gages on the first and last day of the month with past flows on the same dates.

Jul 1	*Jul 31*	
Much Below Normal (<10th Percentile)		
Below Normal (10 - 25)		Cody Scarp
Normal (25 - 75)		Basin Boundary
Above Normal (75 - 90)		Aucilla River Basin
High (>90th Percentile)		Coastal Rivers Basin
		Waccasassa River Basin
		Suwannee River Basin

These gages are operated by the USGS and funded by a number of private and public entities, including the SRWMD, SJRWMD, FDEP, Nestle Waters North America, Packaging Corporation of America, and the Georgia Department of Natural Resources, Environmental Protection Division (EPD).

Figure 7: July 2024 Lake Levels

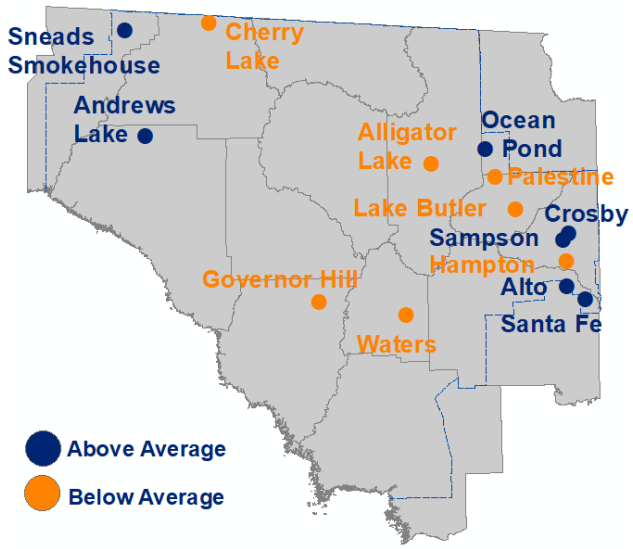

SRWMD lakes react differently to climatic changes depending on their location in the landscape. Some lakes, in particular in the eastern part of the District, are embedded in a surficial or intermediate aquifer over relatively impermeable clay deposits. These lakes rise and fall according to local rainfall and surface runoff. They retain water during severe droughts since most losses occur from evaporation. Other lakes, such as Governor Hill and Waters Lake, have porous or "leaky" bottoms that interact with the Floridan aquifer. These lakes depend on groundwater levels to stay high. If aquifer levels are low, these lakes go dry even if rainfall is normal.

The District currently monitors 14 lakes on a long-term basis; much of the data was originally provided by volunteer observers. Monitoring records began in the 1970s, except for Lakes Butler, Sampson, and Santa Fe, which started in 1957.

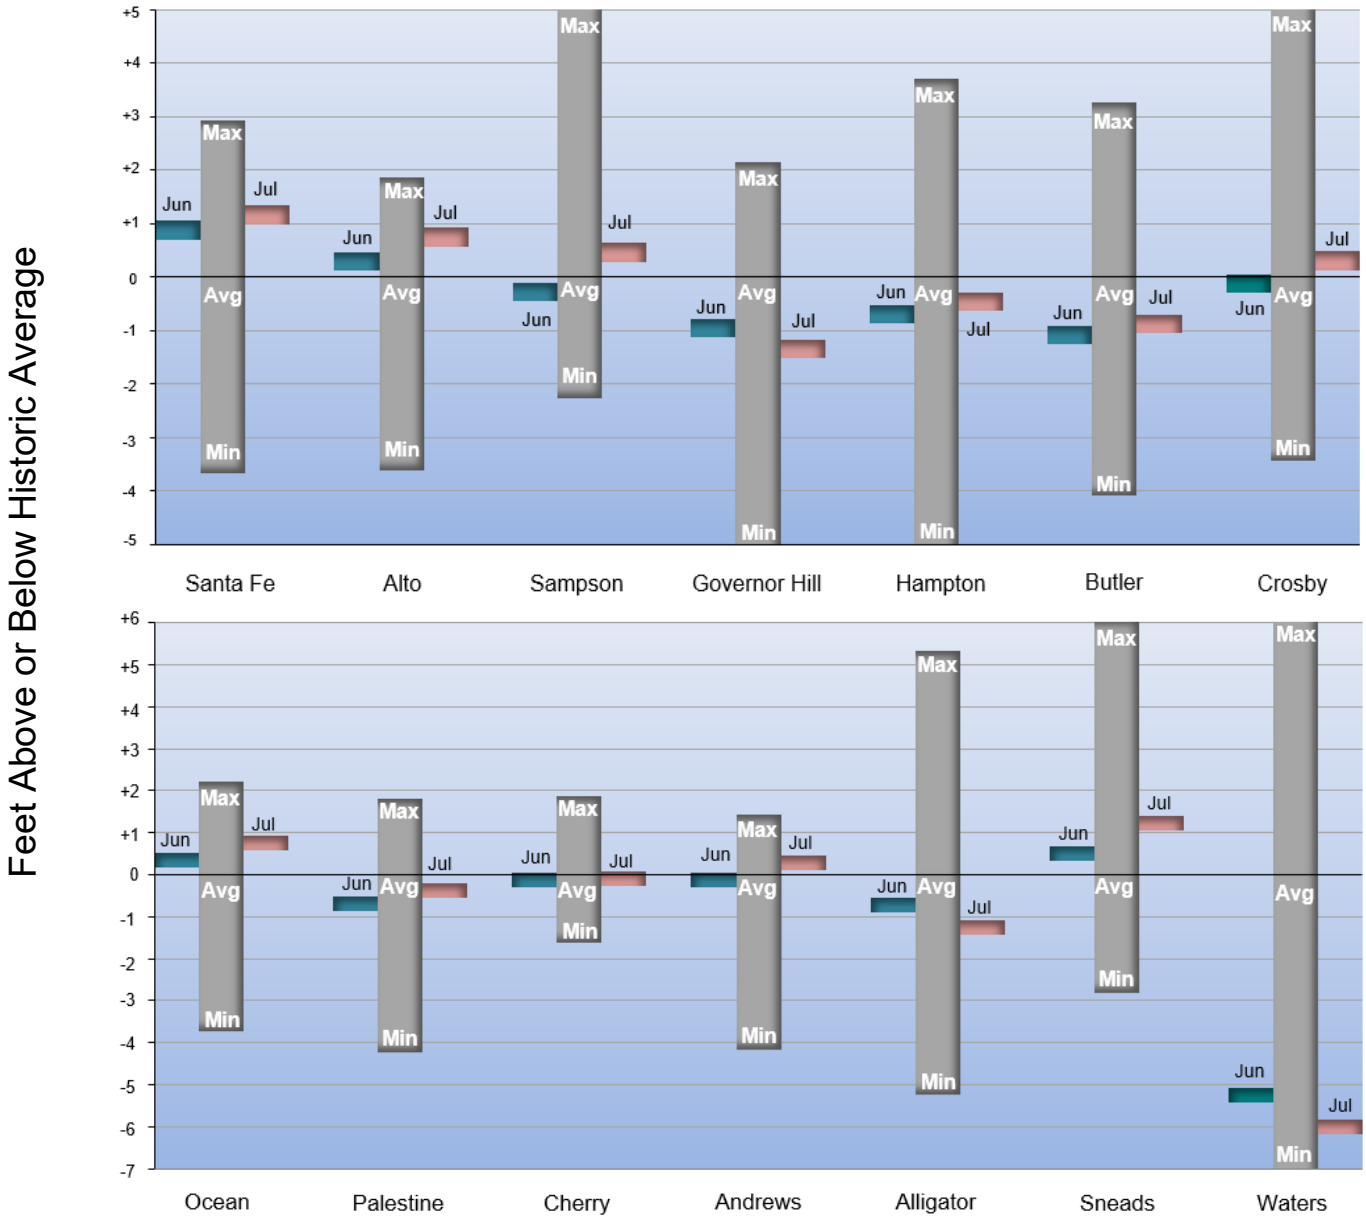

Figure 8: Flow Over the Past 12 Months, Fanning Springs (cubic feet per second)

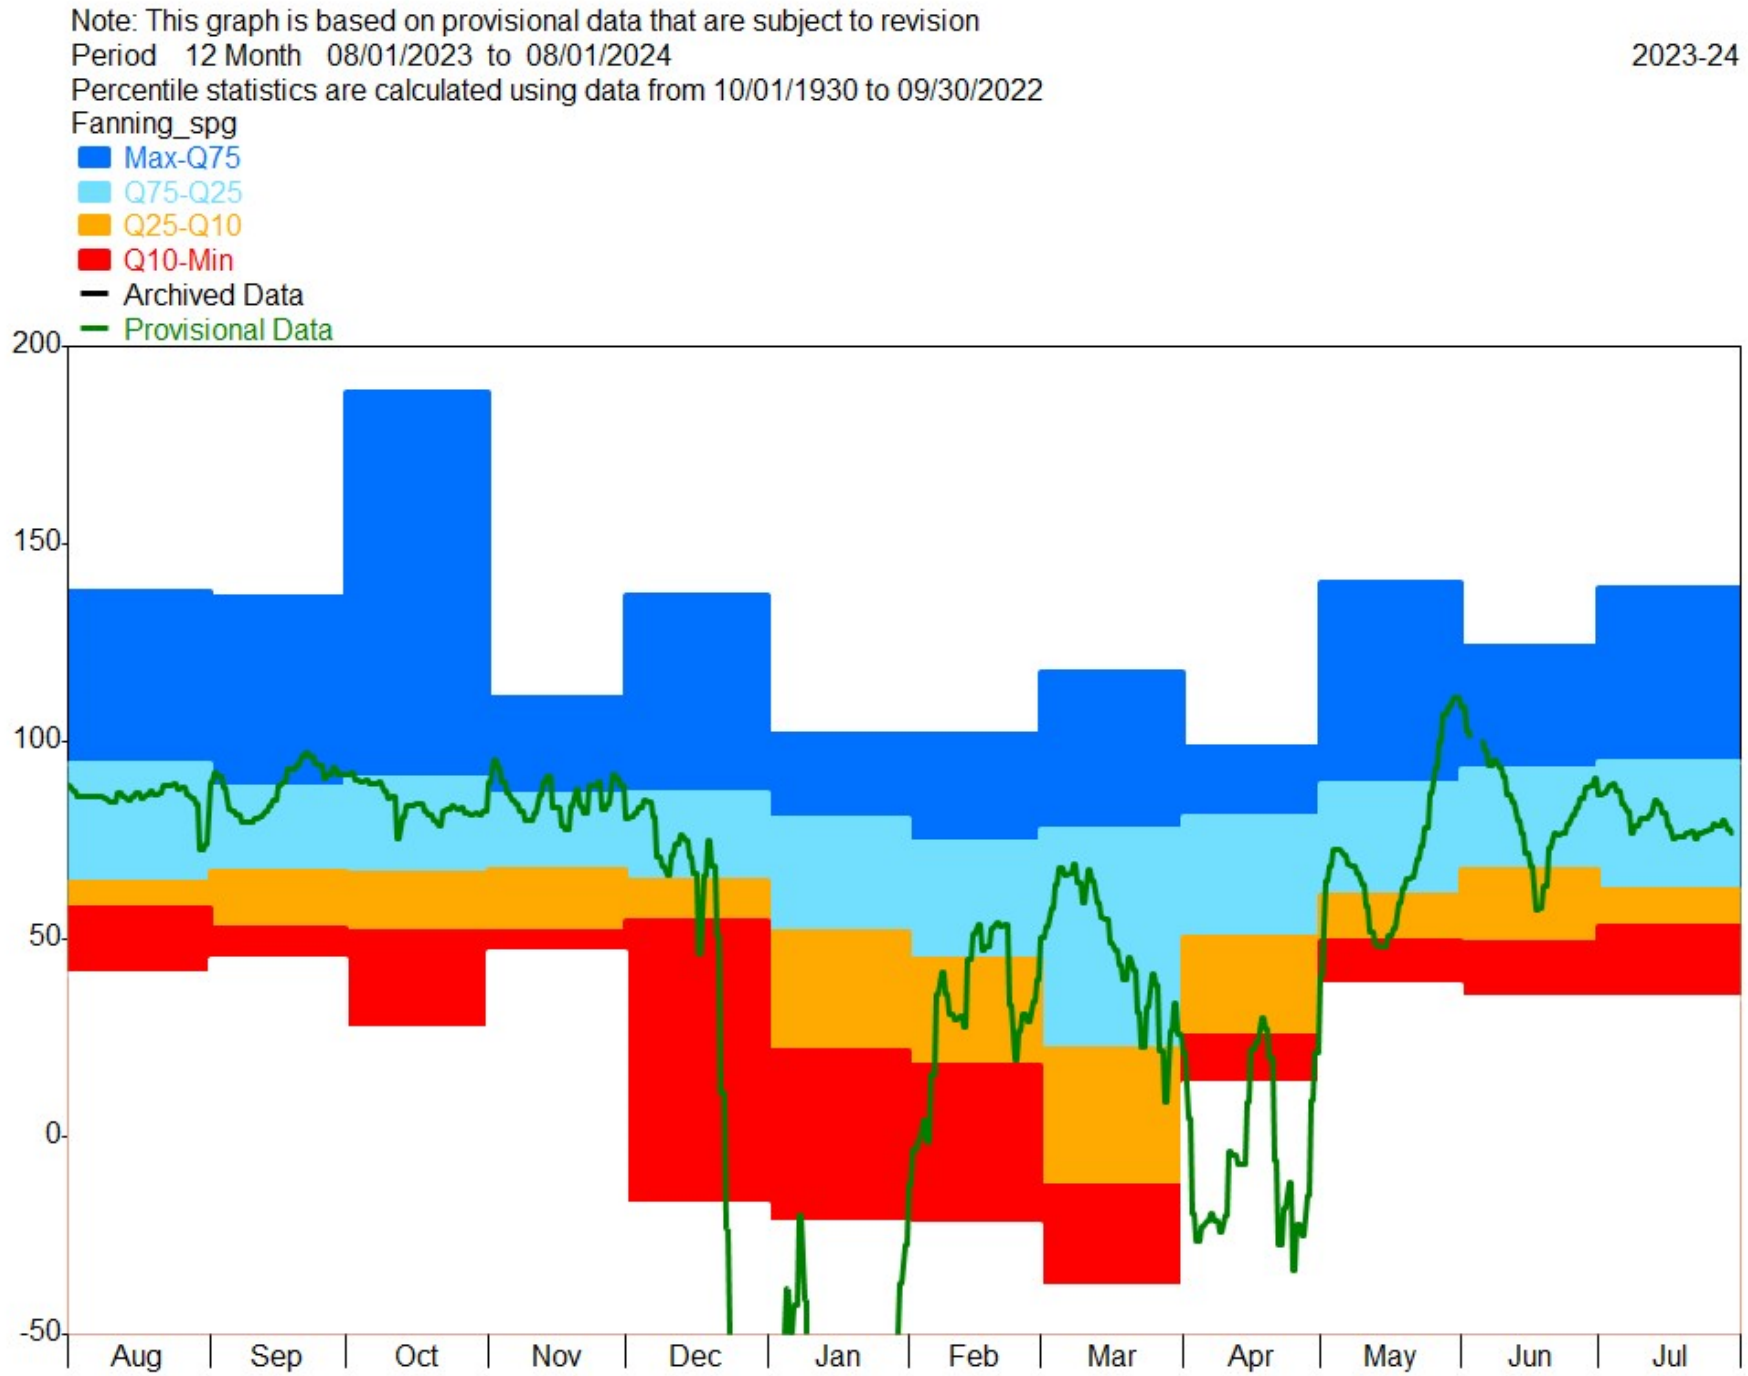

Figure 9: Flow Over the Past 12 Months, Manatee Springs (cubic feet per second)

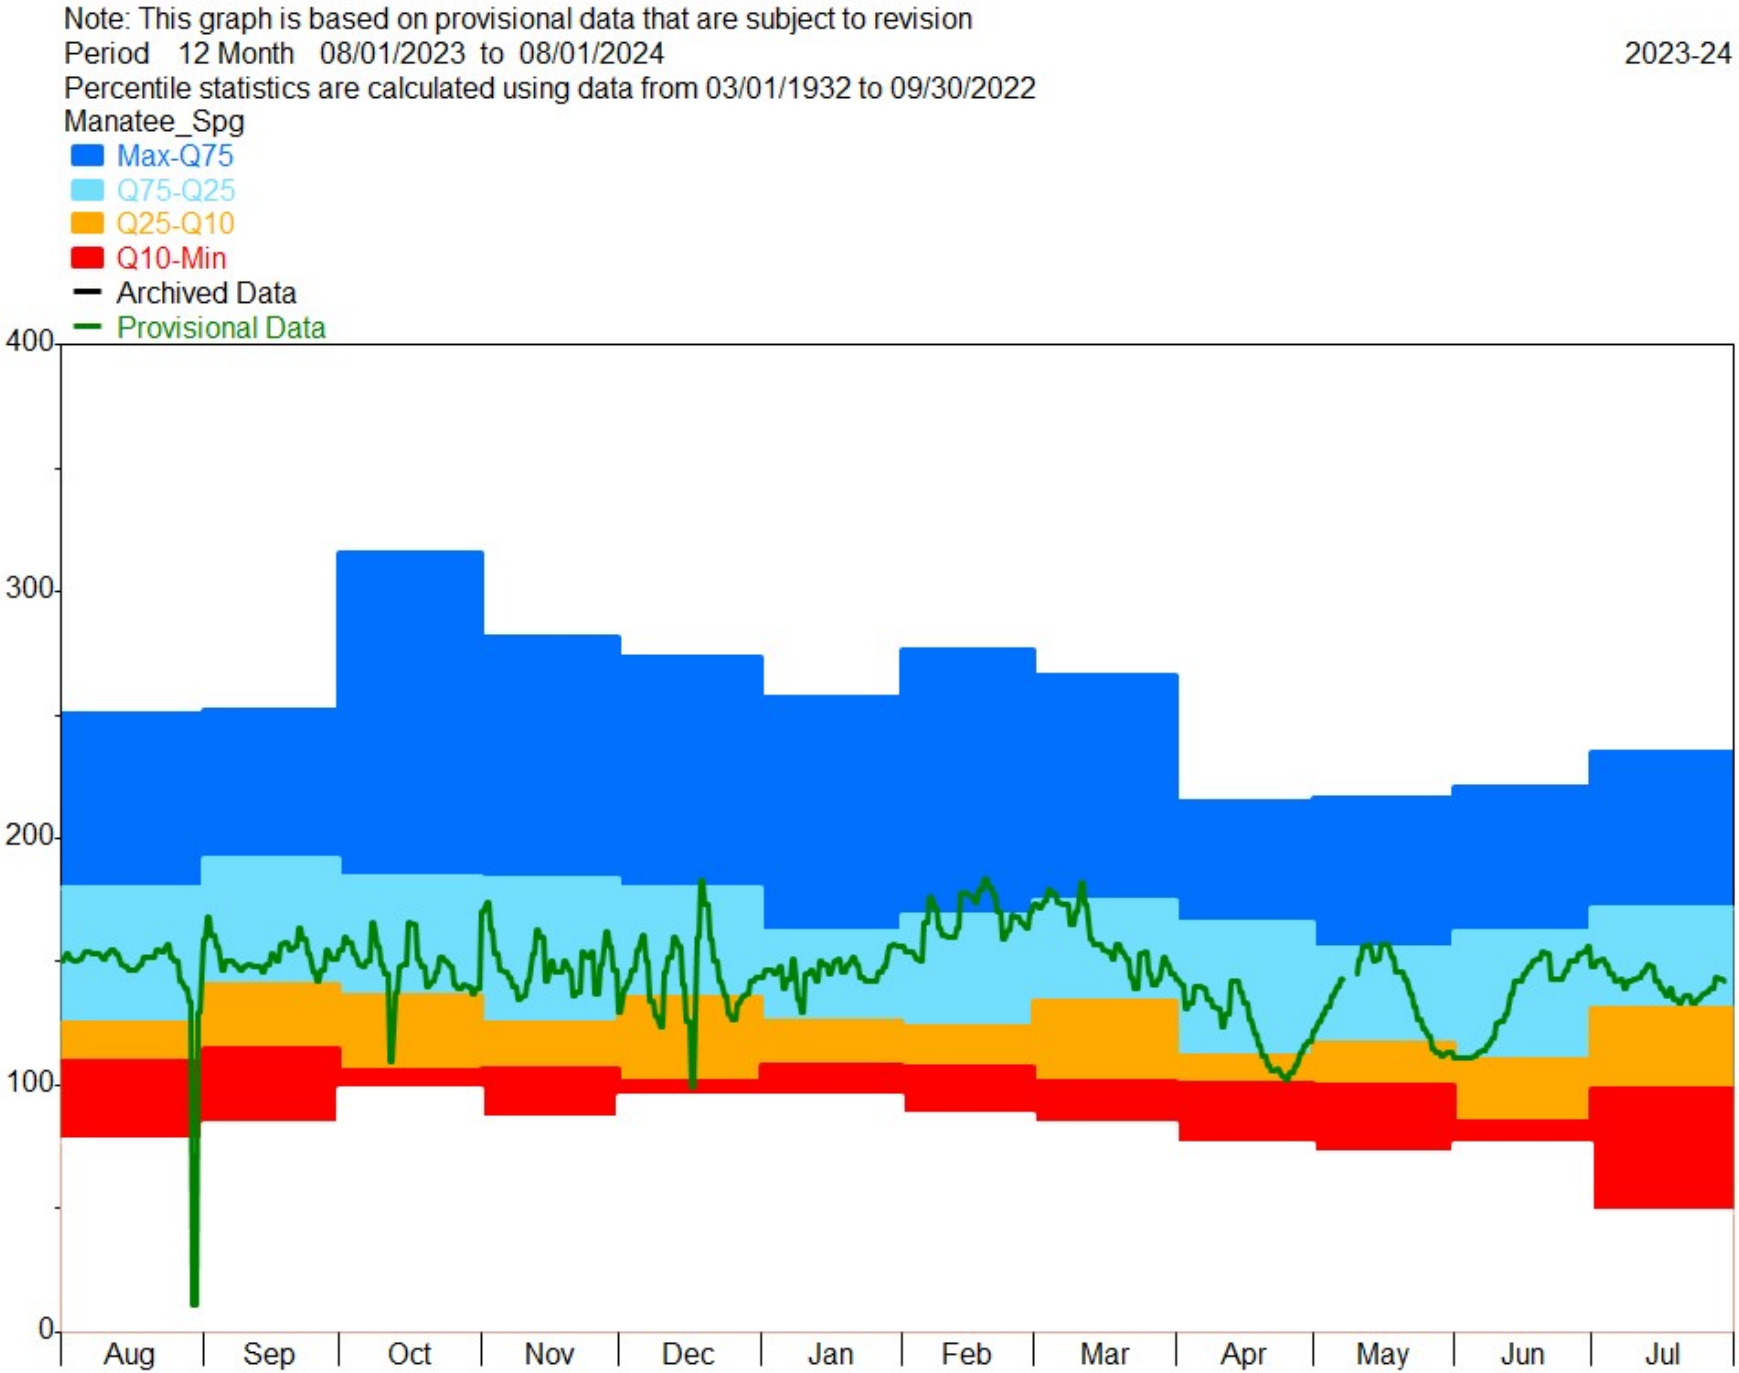

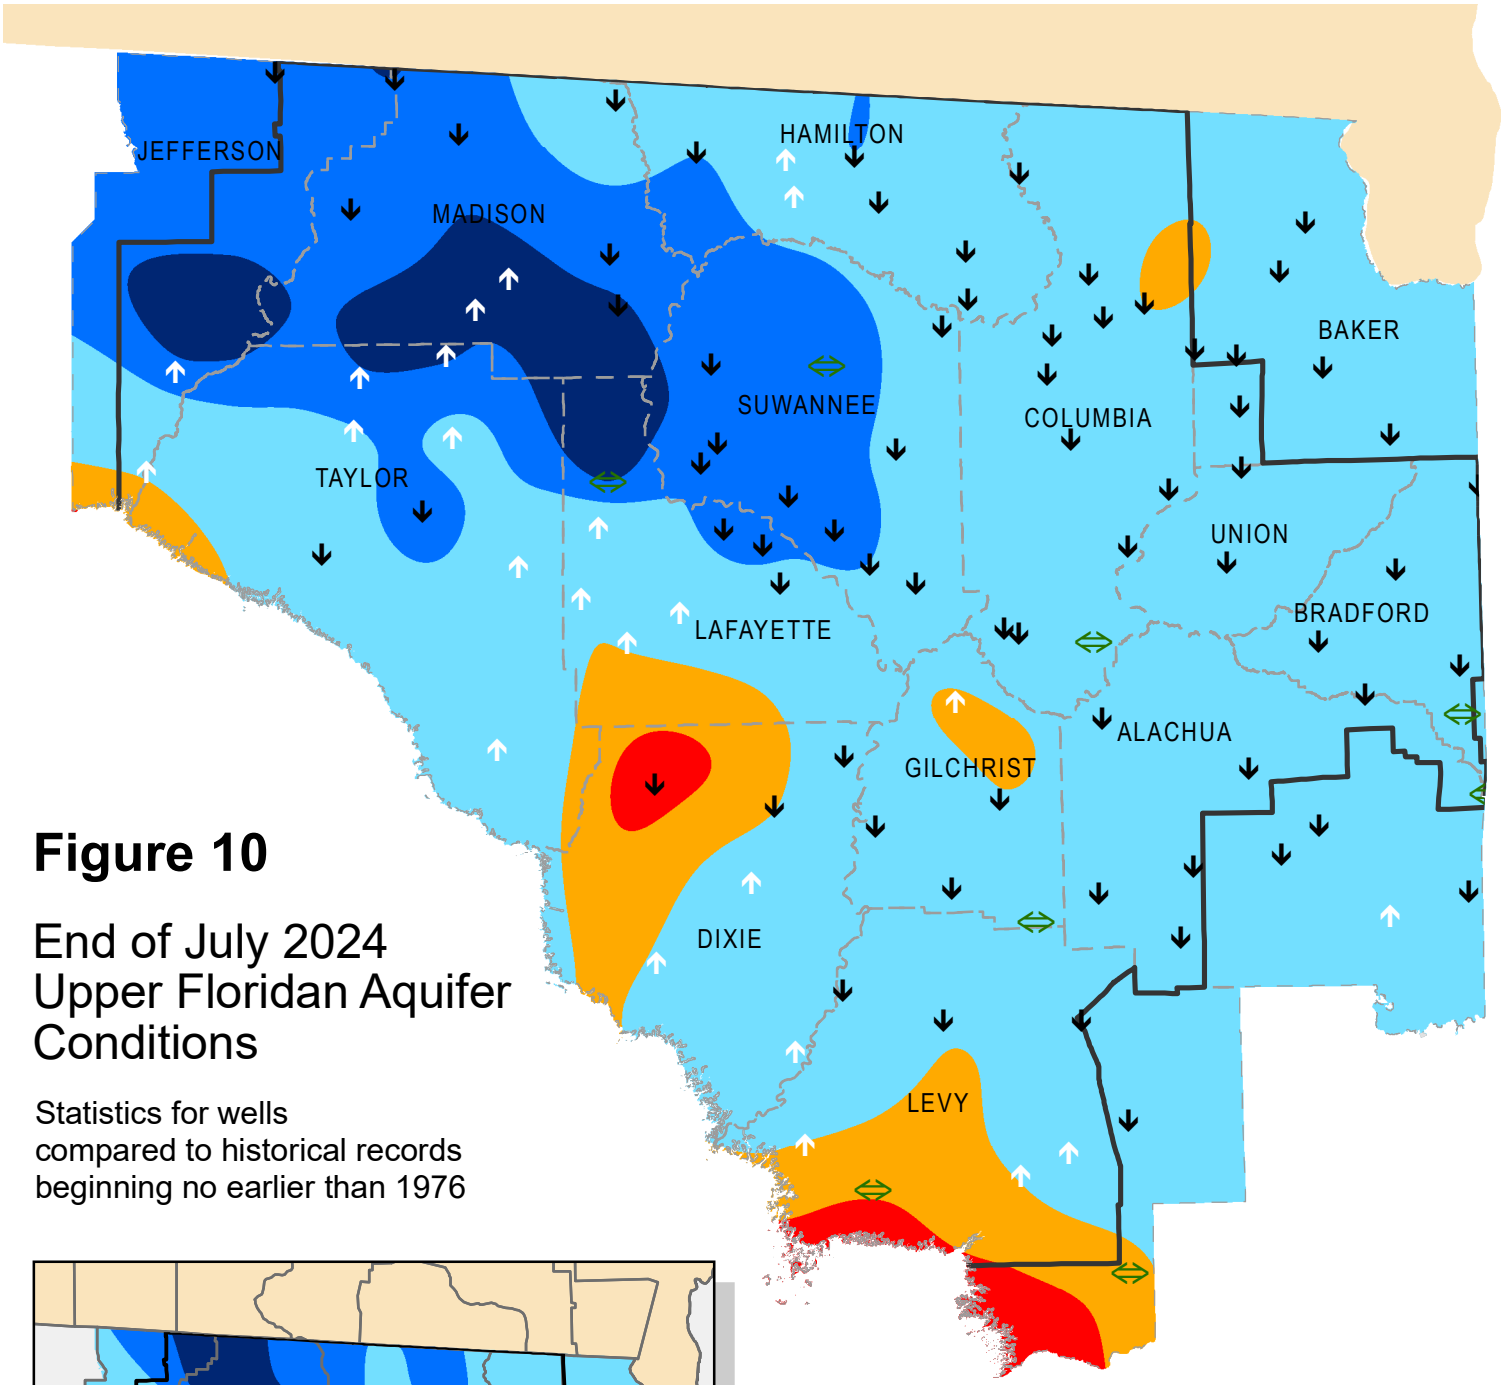

Figure 10

End of July 2024 Upper Floridan Aquifer Conditions

Statistics for wells compared to historical records beginning no earlier than 1976

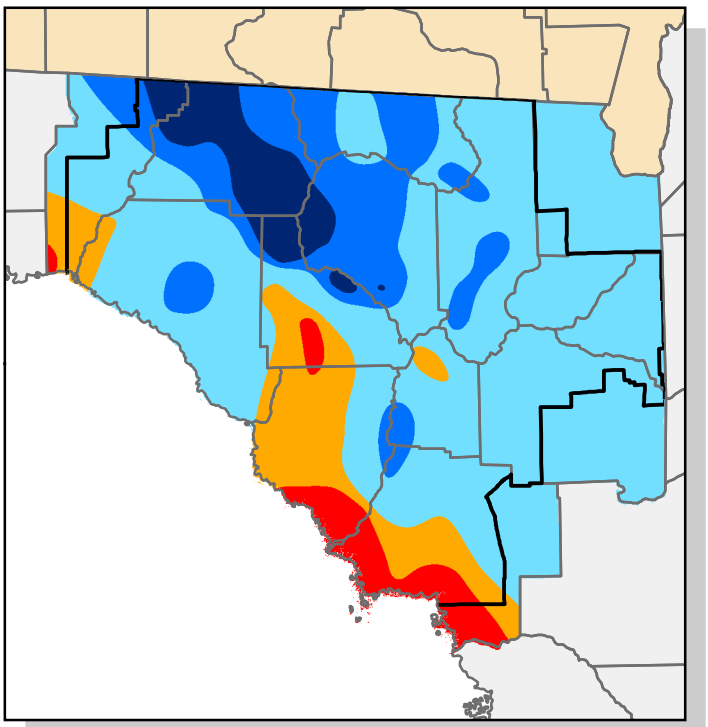

Inset: June Groundwater Percentiles

Additional wells courtesy of SJRWMD, SWFWMD and USGS

- Extremely High (Greater than 90th Percentile)
- High (75th to 90th Percentile)
- Normal (25th to 75th Percentile)
- Low (10th to 25th Percentile)
- Extremely Low (Less than 10th Percentile)
- Increase/decrease in level since last month
- Increase/decrease since last month less than one percent of historic range
- District Boundary

Figure 11: Monthly Groundwater Statistics

Levels August 2023 through July 2024
Period of Record Beginning 1976

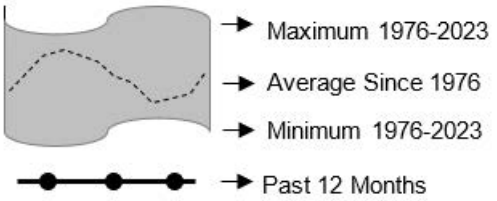

Madison County N010719001
near Greenville

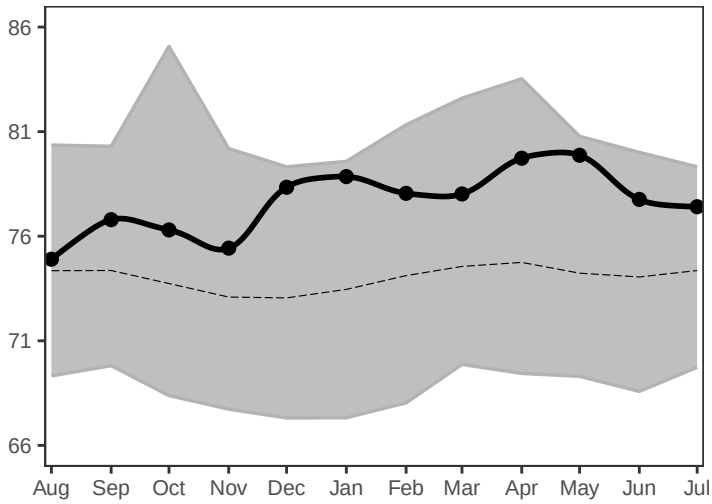

Suwannee County S021335001
near Live Oak

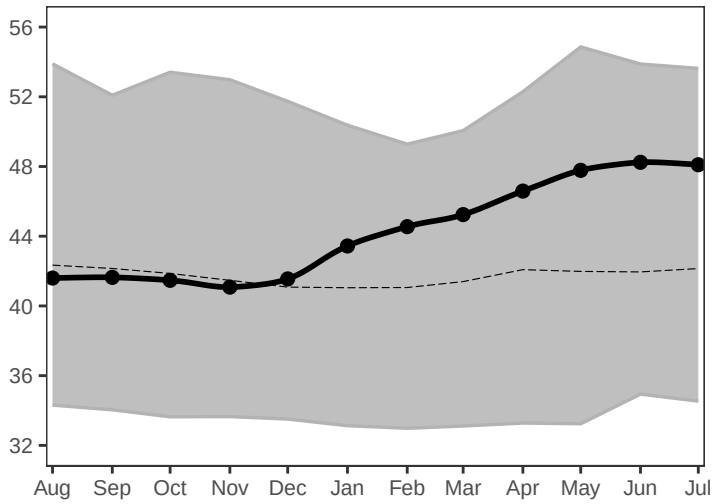

Upper Floridan Aquifer Elevation above NGVD 1929, Feet

Columbia County S041705001
Lake City

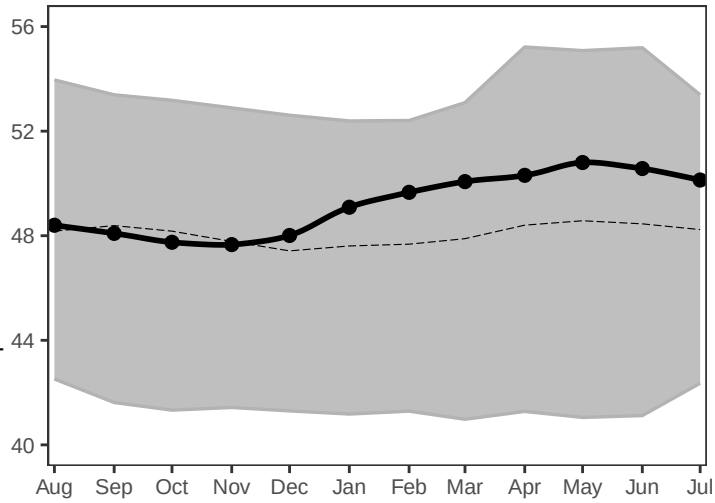

Hamilton County N011422007
near Jasper

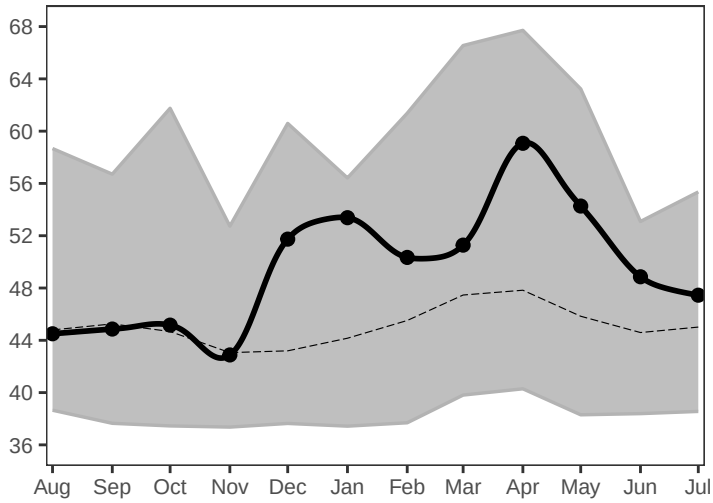

Lafayette County S061114001
near Mayo

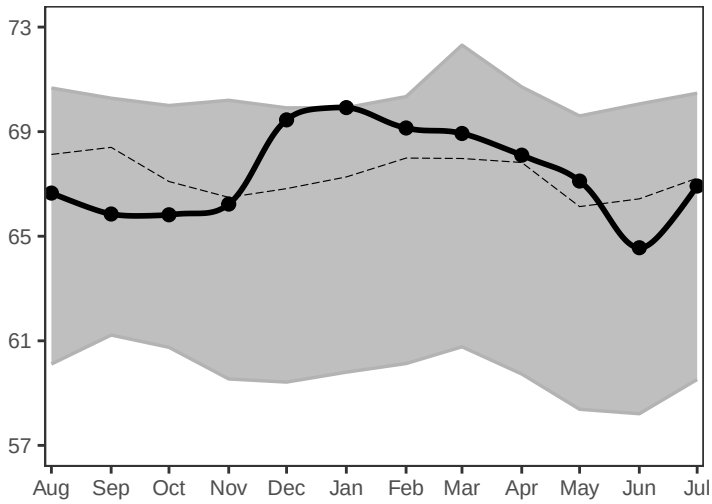

Taylor County S040736005
Perry

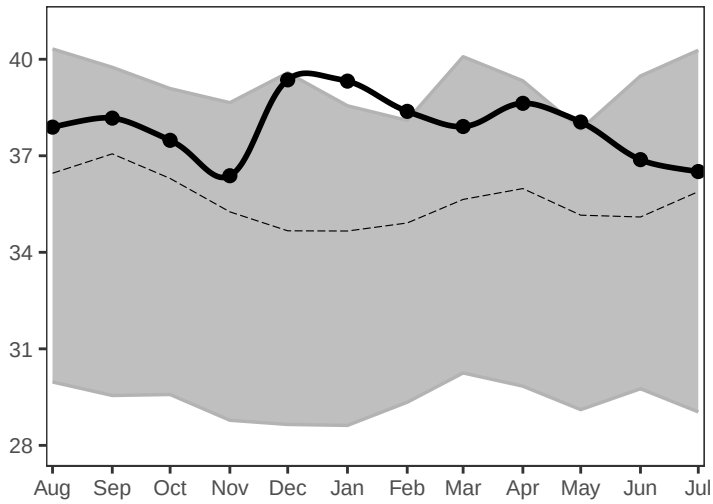

Figure 11, cont.: Monthly Groundwater Statistics

Levels August 2023 through July 2024
Period of Record Beginning 1976

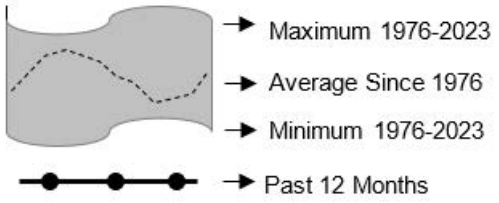

Union County S051933001
near Lake Butler

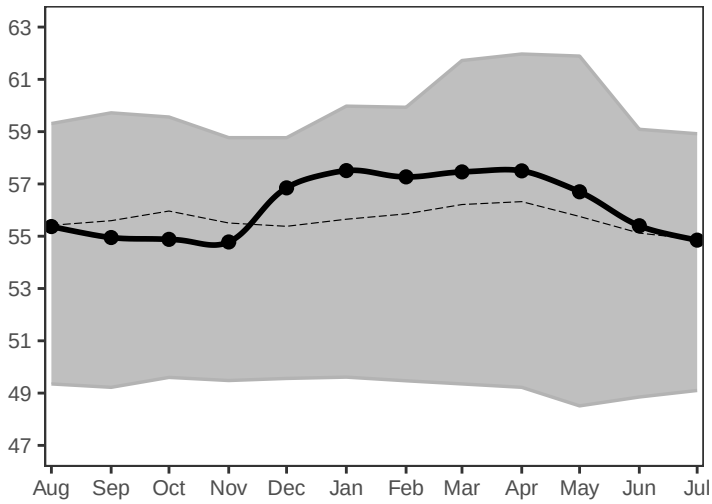

Alachua County S081703001
at High Springs

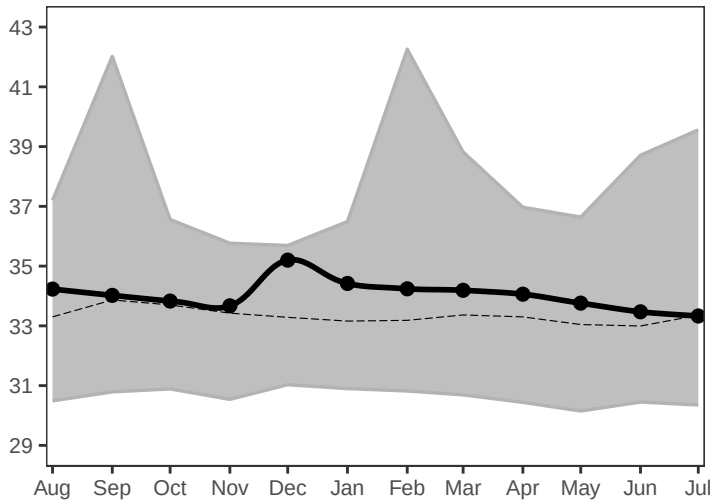

Upper Floridan Aquifer Elevation above NGVD 1929, Feet

Gilchrist County S091607001
near Trenton

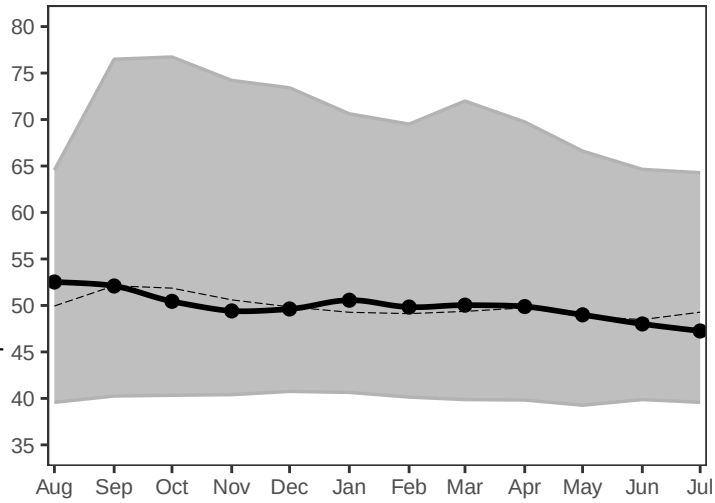

Bradford County S072132001
near Graham

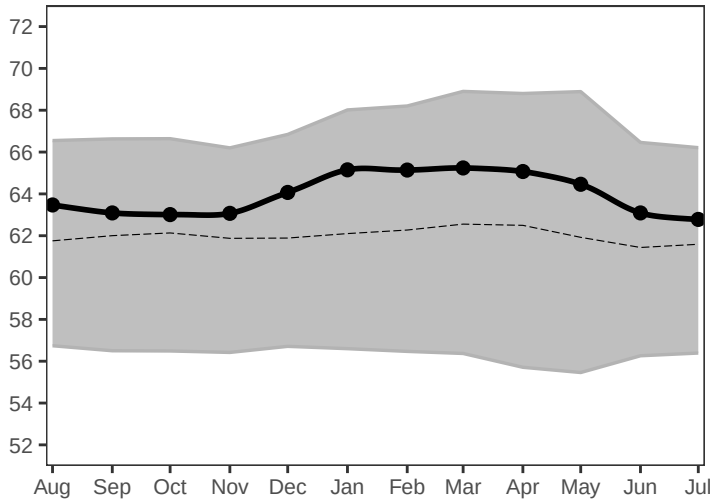

Dixie County S101210001
at Cross City

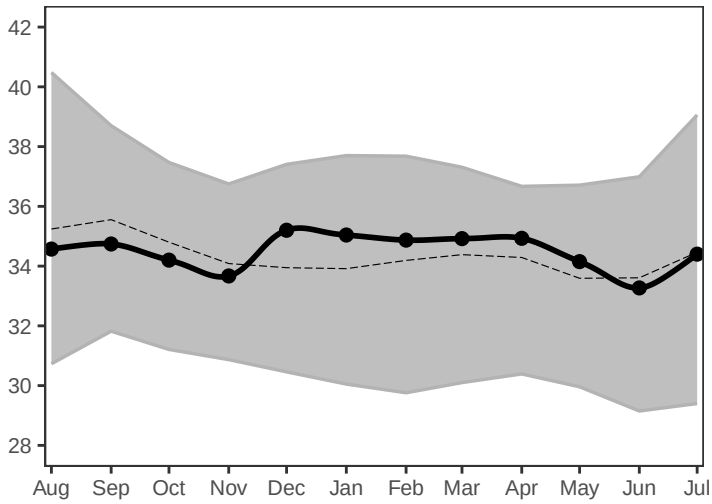

Levy County S131736001
near Bronson

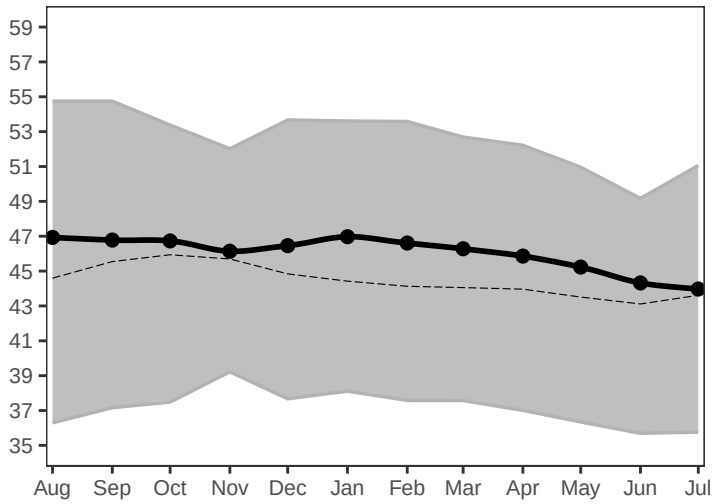

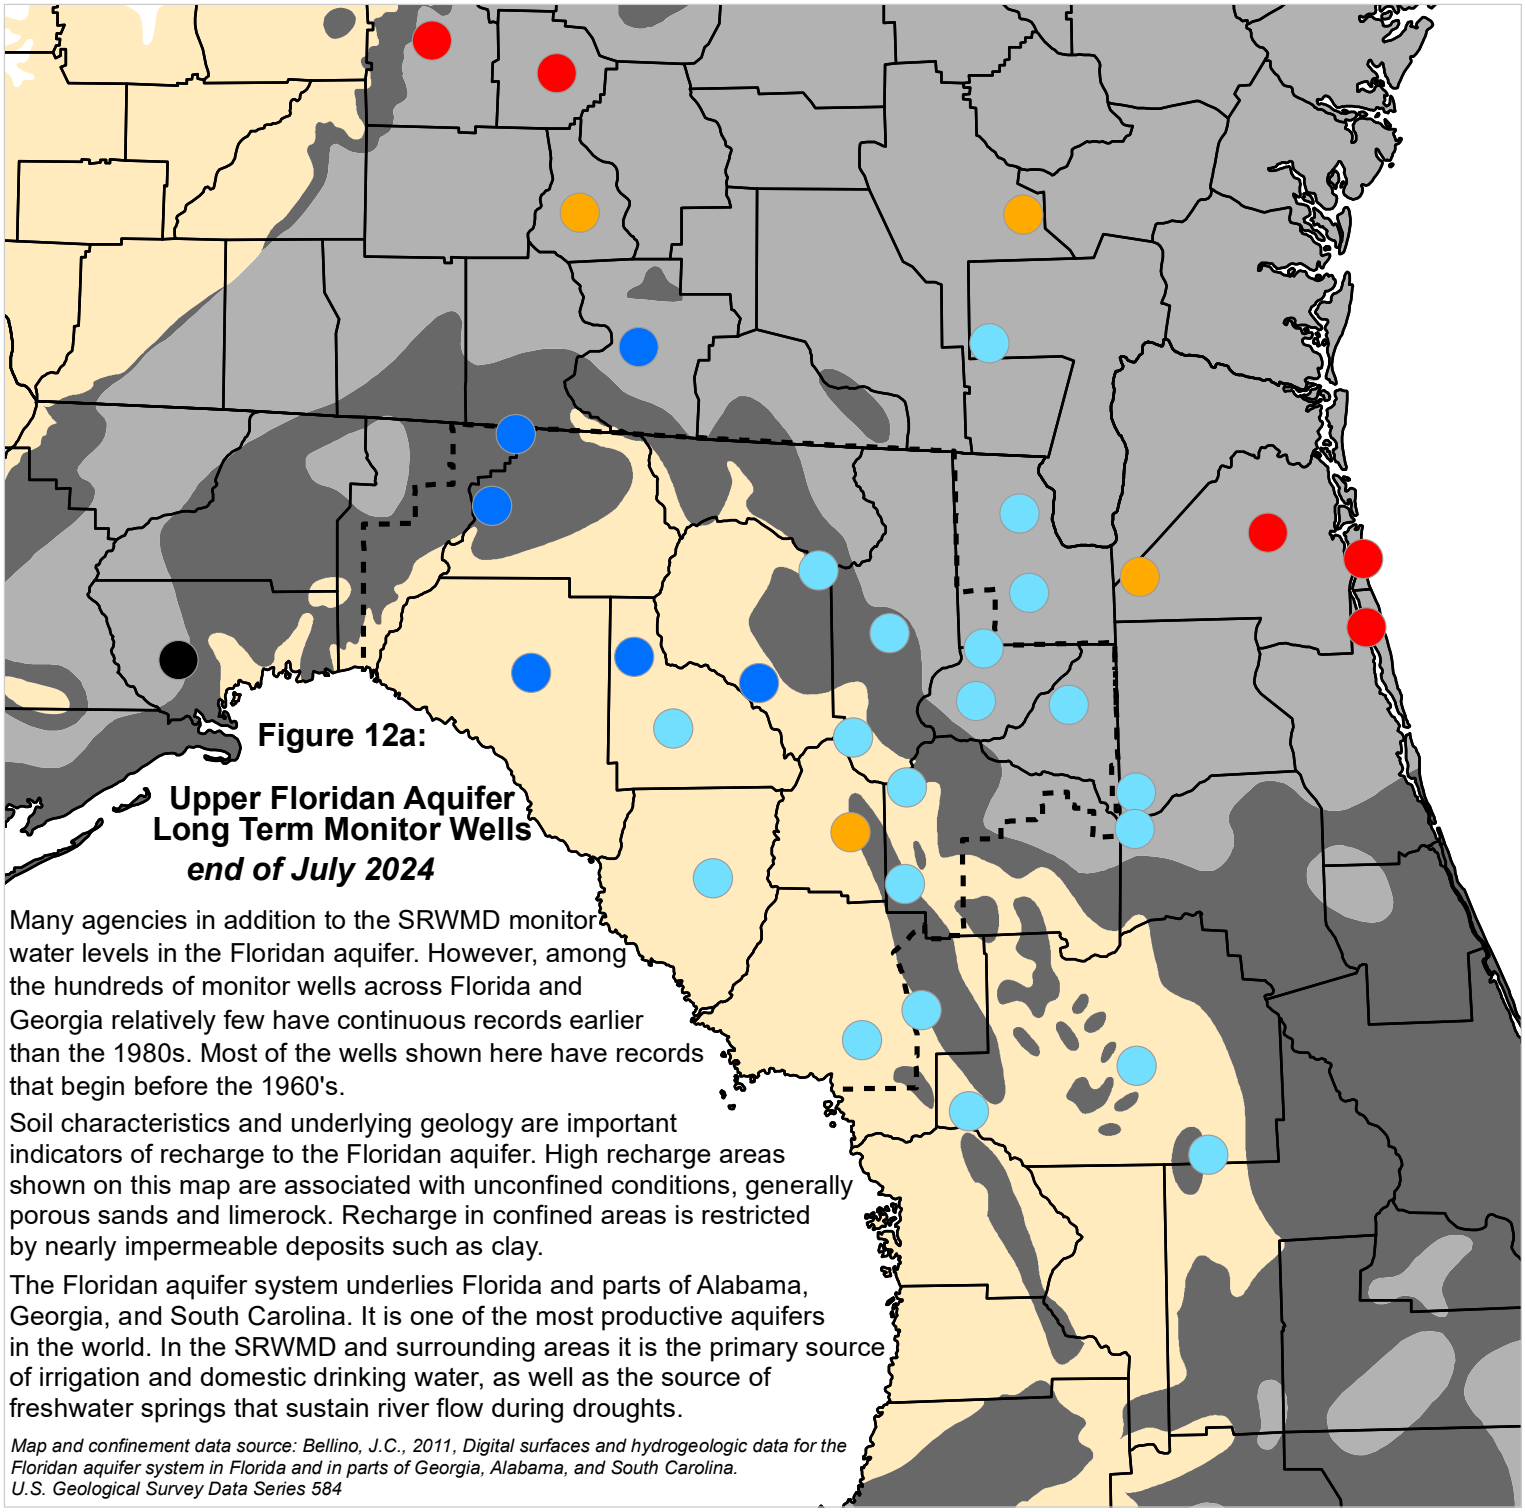

Figure 12a:

Upper Floridan Aquifer Long Term Monitor Wells

end of July 2024

Many agencies in addition to the SRWMD monitor water levels in the Floridan aquifer. However, among the hundreds of monitor wells across Florida and Georgia relatively few have continuous records earlier than the 1980s. Most of the wells shown here have records that begin before the 1960's.

Soil characteristics and underlying geology are important indicators of recharge to the Floridan aquifer. High recharge areas shown on this map are associated with unconfined conditions, generally porous sands and limerock. Recharge in confined areas is restricted by nearly impermeable deposits such as clay.

The Floridan aquifer system underlies Florida and parts of Alabama, Georgia, and South Carolina. It is one of the most productive aquifers in the world. In the SRWMD and surrounding areas it is the primary source of irrigation and domestic drinking water, as well as the source of freshwater springs that sustain river flow during droughts.

Map and confinement data source: Bellino, J.C., 2011, Digital surfaces and hydrogeologic data for the Floridan aquifer system in Florida and in parts of Georgia, Alabama, and South Carolina. U.S. Geological Survey Data Series 584

Occurrence of Confined and Unconfined Conditions in the Upper Floridan Aquifer

- Confined: Upper confining unit is generally greater than 100 feet thick and unbreached. Recharge is low.
- Semi-confined: Upper confining unit is generally less than 100 feet thick, breached, or both. Recharge is moderate.
- Unconfined: Upper confining unit is absent or very thin. Recharge is high.
- SRWMD Boundary

Percentile of Most Recent Water Level Relative to Entire Record

- Very High (Greater than 90th Percentile)
- High (75th to 90th Percentile)
- Normal (25th to 75th Percentile)
- Low (10th to 25th Percentile)
- Very Low (Less than 10th Percentile)
- Data Not Available

Figure 12b: Regional Long Term Upper Floridan Aquifer Levels

Data through July 2024

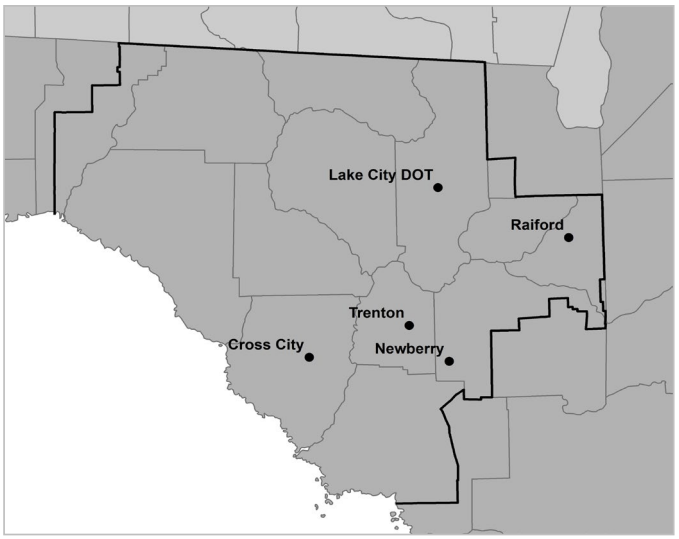

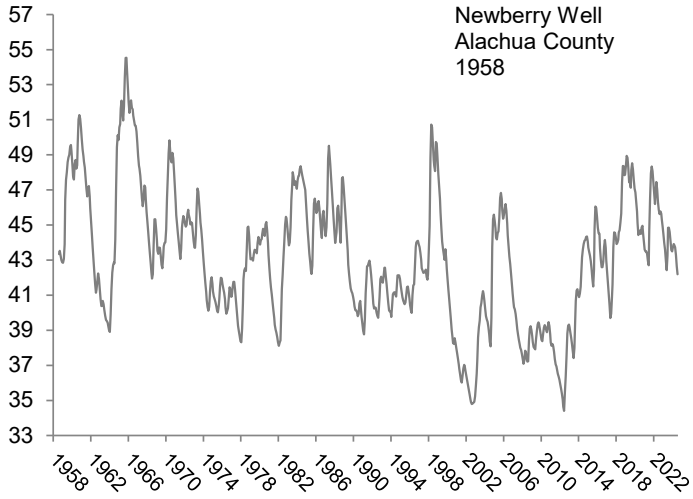

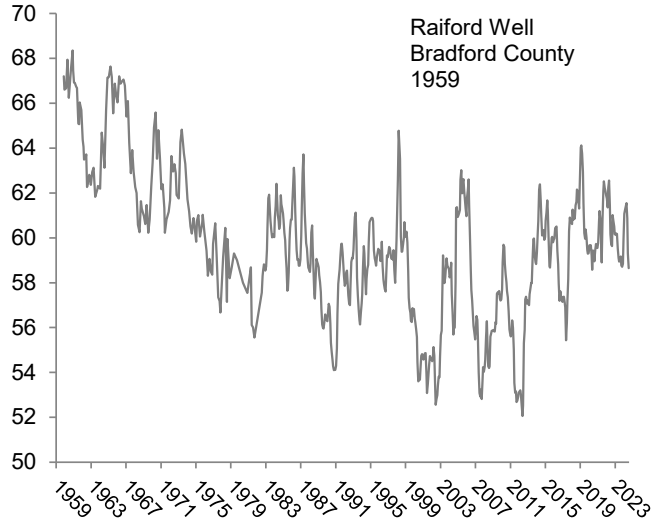

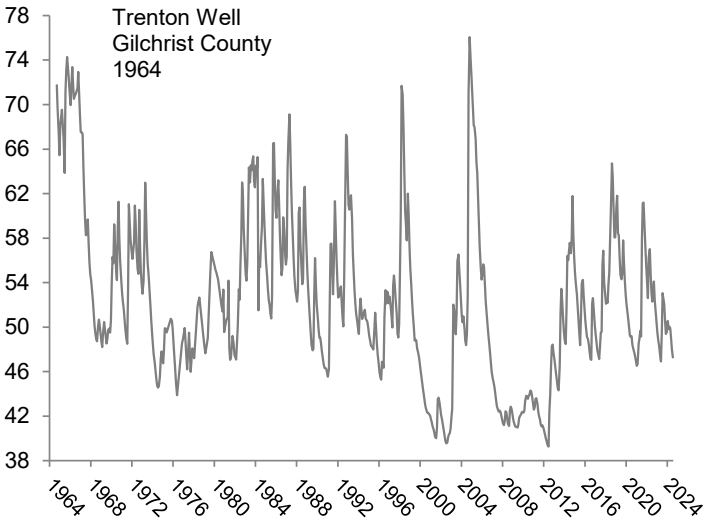

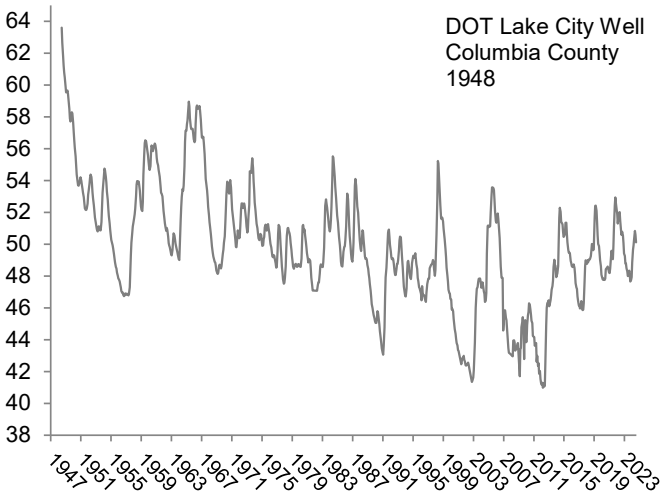

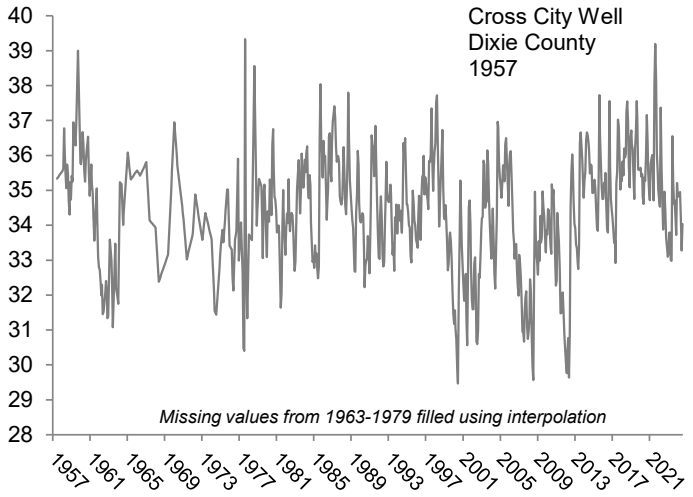

Upper Floridan Aquifer Elevation above NGVD 1929, Feet